




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

| | | |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| (51) International Patent Classification ⁶ : H04Q 7/00 | A2 | (11) International Publication Number: WO 99/66740 (43) International Publication Date: 23 December 1999 (23.12.99) |
| (21) International Application Number: PCT/US99/12897 (22) International Filing Date: 9 June 1999 (09.06.99) (30) Priority Data: 09/098,216 16 June 1998 (16.06.98) US 09/271,191 17 March 1999 (17.03.99) US (71)(72) Applicants and Inventors: EINOLA, Heikki [FI/FI]; Hi- ihtäjantie 8 A 15, FIN-00810 Helsinki (FI). RAJANIEMI, Jaakko [FI/FI]; Karstulantie 8 B 31, FIN-00550 Helsinki (FI). LE, Khiem [US/US]; 607 St. Andrews Place, Coppel, TX 75019 (US). (74) Agent: BRUESS, Steven, C.; Merchant & Gould P.C., 3100 Norwest Center, 90 South Seventh Street, Minneapolis, MN 55402-4131 (US). | | (81) Designated States: AE, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published Without international search report and to be republished upon receipt of that report. |

(54) Title: LOCATION UPDATE METHOD AND INTER CORE NETWORK ENTITY HANDOVER METHOD

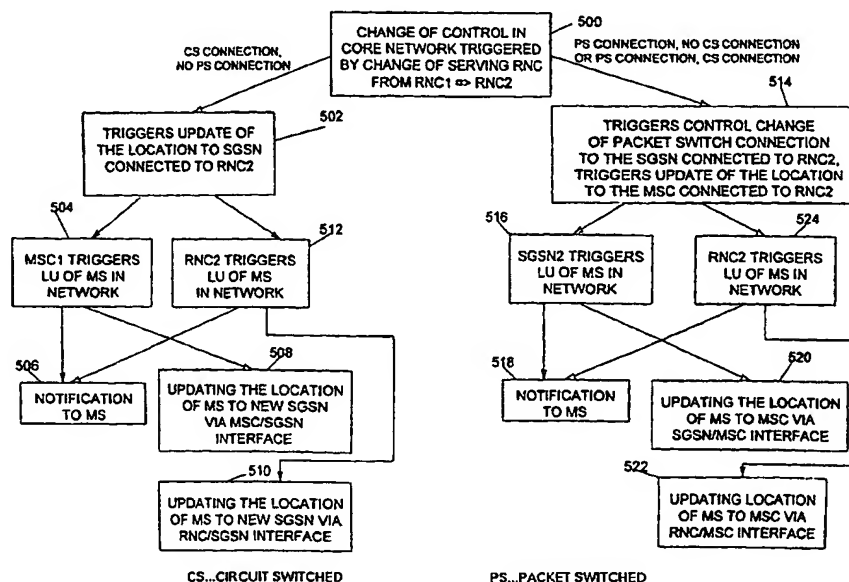

(57) Abstract

A scheme for providing a notification to a Mobile Station (MS) to initiate a location update in a mobile telecommunication system, a scheme for providing update of location of the MS to a new Core Network (CN) entity via interface between the CN entities, a scheme for providing update of location of the MS to a new CN entity via interface between a CN entity and a Serving RNC (SRNC), a scheme for providing an inter Core Network (CN) handover, e.g. inter-SGSN handover, in a mobile telecommunication system, are disclosed.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

| | | | | | | | |
|----|--------------------------|----|------------------------------------------|----|----------------------------------------------|----|--------------------------|
| AL | Albania | ES | Spain | LS | Lesotho | SI | Slovenia |
| AM | Armenia | FI | Finland | LT | Lithuania | SK | Slovakia |
| AT | Austria | FR | France | LU | Luxembourg | SN | Senegal |
| AU | Australia | GA | Gabon | LV | Latvia | SZ | Swaziland |
| AZ | Azerbaijan | GB | United Kingdom | MC | Monaco | TD | Chad |
| BA | Bosnia and Herzegovina | GE | Georgia | MD | Republic of Moldova | TG | Togo |
| BB | Barbados | GH | Ghana | MG | Madagascar | TJ | Tajikistan |
| BE | Belgium | GN | Guinea | MK | The former Yugoslav Republic of Macedonia | TM | Turkmenistan |
| BF | Burkina Faso | GR | Greece | | | TR | Turkey |
| BG | Bulgaria | HU | Hungary | ML | Mali | TT | Trinidad and Tobago |
| BJ | Benin | IE | Ireland | MN | Mongolia | UA | Ukraine |
| BR | Brazil | IL | Israel | MR | Mauritania | UG | Uganda |
| BY | Belarus | IS | Iceland | MW | Malawi | US | United States of America |
| CA | Canada | IT | Italy | MX | Mexico | UZ | Uzbekistan |
| CF | Central African Republic | JP | Japan | NE | Niger | VN | Viet Nam |
| CG | Congo | KE | Kenya | NL | Netherlands | YU | Yugoslavia |
| CH | Switzerland | KG | Kyrgyzstan | NO | Norway | ZW | Zimbabwe |
| CI | Côte d'Ivoire | KP | Democratic People's Republic of Korea | NZ | New Zealand | | |
| CM | Cameroon | KR | Republic of Korea | PL | Poland | | |
| CN | China | | | PT | Portugal | | |
| CU | Cuba | KZ | Kazakstan | RO | Romania | | |
| CZ | Czech Republic | LC | Saint Lucia | RU | Russian Federation | | |
| DE | Germany | LI | Liechtenstein | SD | Sudan | | |
| DK | Denmark | LK | Sri Lanka | SE | Sweden | | |
| EE | Estonia | LR | Liberia | SG | Singapore | | |

LOCATION UPDATE METHOD AND INTER CORE NETWORK ENTITY HANDOVER METHOD

BACKGROUND OF THE INVENTION

1. Field of the Invention.

5 This invention relates in general to a cellular communication system, and more particularly to a location update method and an inter Core Network (CN) entity handover method, and further more particularly to a location update method and an inter-SGSN handover method in a 3rd Generation (3G) cellular system.

2. Description of Related Art.

10 Cellular systems have had a direct effect on the lives of millions over the past few years. For the first time, people are able to make and receive phone calls without being tied to a specific location. Mobile phones, as part of the cellular systems, have allowed people to break the tie between location and access to communication. Mobile phones have also allowed people to reach another who is in
15 move. With the development in cellular systems, people are allowed to reach another who is mobile in anywhere at anytime.

The first generation of mobile communication systems were born in the early 1980s. The marriage of radio and telephone technologies gave birth to mobile phones and triggered a turning point in telecommunications. Adding radio access to
20 a telephone network meant that for the first time in history, the concept of a telephone being at a fixed point in the network was no longer valid. The benefits of being able to make and receive telephone calls anywhere had appeal to business people – the original market. In the first generation of cellular networks, analog wireless technology were used for the user connection (called the “air interface”).
25 Every voice channel had its own narrow frequency band, using a technology called Frequency Division Multiple Access (FDMA).

However, as the demand for mobile phones grew and grew, regularly exceeding forecasts, it became obvious that the available radio spectrum would not be adequate to accommodate the expected numbers of mobile phone users. The
30 digital technology became the solution to the problem. The answer lay in new

digital wireless technologies that allow larger numbers of mobile subscribers to be supported within a given frequency allocation. Time Division Multiple Access (TDMA) technology is used in which a broader frequency channel is divided into intermittent time-slots, i.e. several calls share the same frequency channel at any one
5 time. The digital technology also offered other important benefits. It provided better voice quality and improved security against unauthorized eavesdropping. Another technology, Code Division Multiple Access (CDMA) has also been developed subsequently to increase capacity.

The first and second generation mobile communication systems were mainly
10 set to support voice communications, although today's mobile phones can also be used for data transfer at rates that are acceptable for relatively low-speed data applications such as sending and receiving of faxes and e-mail. However, these systems do not support high-speed data or video applications. The third generation mobile communication system is being developed to remove the bandwidth
15 bottleneck and support a whole new range of voice, data, video, and multimedia services. For example, smart messaging is bringing Internet services to every mobile user's fingertips. As people become used to the freedom that mobile communications have provided, they will become more demanding about the information and services required to benefit their lives.

20 The demand by consumers all over the world for mobile communications service continues to expand at a rapid pace and will continue to do so for at least the next decade. To satisfy such demand, more and more innovative mobile telecommunications networks are being built in this growing industry.

In the 3rd generation cellular systems, many practical techniques are being
25 developed over the past few years. The mobile telecommunication network comprises switching functions, service logic functions, database functions, and Mobility Management (MM) functions that enable subscribers to be mobile. These are some of the functions provided by Mobile Switching Centers (MSCs) for serving Circuit Switched (CS) connections, by Visitor Location Registers (VLR) for serving
30 CS connections, or by other network entities, for example, Serving GPRS Support Node (SGSN) for Packet Switched (PS) connections (GPRS refers to General Packet Radio System).

Generally, the database in the Core Network (CN) keeps tracks of the location of Mobile Stations (MSs). In one case, the CN comprises both entities, MSC and SGSN, to implement such database. Each of the MSs can have a CS or PS connection service from the CN by sending radio signals to its Base Station (BS).

5 Each of the BSs is controlled by a Radio Network Controller (RNC) which connects to the CN.

When a MS with an active connection moves from one area to another, a handover (also known as handoff) procedure is performed between the BSs. During a handover procedure, a CN entity can operate in two different ways: one is called
10 anchoring, and the other is called floating. In an anchoring procedure, the control of the MS remains in the first network entity where the connection between the MS and the CN was started, whereas in a floating procedure, the control of the MS is changed along with the move of the MS. Fig. 6 shows an anchoring procedure. Fig. 7 shows a floating procedure.

15 One of the problems in developing a 3rd generation cellular system is location update when a MS, e.g. with an active connection, moves from one area to another. This problem does not appear in a 2nd generation cellular system due to the fact that the 2nd generation cellular system does not use macro diversity and Iur-interface in the systems. In a conventional 2nd generation cellular system, e.g. GSM (Global
20 System for Mobile communications), only one Base Station (BS) receives radio signals from a MS. Accordingly, when a MS moves from one area to another, the MS knows which BS controls the MS so that a location update can be performed by communicating between the MS and the CN via this BS. However, in a 3rd generation cellular system, to increase the capacity of the data transmission, a macro
25 diversity and Iur-interface concept are introduced in the system. In particular, multiple Base Stations can receive radio signals from and to a MS, and due to the Iur-interface, the BSs are not necessarily connected to one Radio Network Controller (RNC). A Serving RNC (SRNC) informs the BS which MS is under its control and is connected to the CN entities in the CN. When a MS moves, the control to the MS
30 may be changed from one RNC to the other RNC in a fashion that the MS may not be involved. As a result, when a MS moves from one area to another, the MS does

not know when the SRNC is changed. If the MS sends a location update before the SRNC is changed, the location update may be sent to a wrong CN entity.

Another problem in a 3rd generation cellular systems is that during an active PS connection from a SGSN, a MS may move to an area where the SGSN should be changed. For instance, when a SRNC for a MS is changed, the new SRNC is connected to the new SGSN. In a 3rd generation cellular system, changing of a controlling SGSN needs to be executed in the CN because the MS does not know when it has entered in the new SGSN area and which RNC controls the MS due to the possible macro diversity and Iur-interface. In the existing 2nd generation cellular system, the new SGSN has to request from the old SGSN all information after the new SGSN receives a location update from the MS. During such a SGSN handover, all the radio related entities in RNCs, BSs, MSs, etc., have to be released. Thus, it is inefficient to perform an inter-SGSN handover.

Therefore, it can be seen that there is a need for an initiation scheme for location update of a MS in a 3rd generation cellular system. It can also be seen that there is a need for an inter-SGSN handover scheme in a 3rd generation cellular system.

SUMMARY OF THE INVENTION

To overcome the problems in the prior art described above, and to overcome other problems that will become apparent upon reading and understanding the present specification, the present invention discloses a scheme for providing a notification to a Mobile Station (MS) to initiate a location update in a 3rd generation system. Further, the present invention discloses a scheme for providing update of location of the MS to a new Core Network (CN) entity via interface between the CN entities. Furthermore, the present invention discloses a scheme for providing update of location of the MS to a new CN entity via interface between a CN entity and a Serving RNC (SRNC). Moreover, the present invention discloses a scheme for providing an inter Core Network (CN) handover, e.g. inter-SGSN handover, in a 3rd generation cellular system.

In the present invention, several schemes for notifying the MS to initiate a location update from the MS to a Core Network (CN) while the MS is having an ongoing connection are disclosed. In one embodiment, the present invention

provides a notification to the MS when there is a Serving Radio Network Controller (SRNC) relocation, which includes the following steps of: serving the MS by a first RNC; moving the MS from a first area to a second area wherein service in the first area is controlled by the first RNC, and service in the second area is controlled by a second RNC; serving the MS by the second RNC, so that the control of the MS is changed from the first RNC to the second RNC; determining by the second RNC whether a notification to the MS for the location update is needed based on factors such as configuration of the CN which is connected to the plurality of RNCs and/or the types of connection that the MS is having, etc.; and notifying, by the second RNC, the MS that a location update from the MS should be performed; and if the notification to the MS for the location update is determined by the second RNC to be needed, updating a location of the MS in the CN. Alternatively, the RNC does not determine whether a notification to the MS for the location update is needed. It is up to the MS to determine whether the location update should be made. In this case, the second RNC directly notifies the MS that a location update from the MS should be performed, and if the MS decides to update the location, MS sends the location update to the CN.

In an alternative embodiment, the present invention provides an update of the location of the MS from a SRNC to a new idle CN entity via an interface between the SRNC and the new idle CN entity when there is a Serving Network Controller (SRNC) relocation, which includes the following steps of: serving the MS by a first RNC; moving the MS from a first area to a second area wherein service in the first area is controlled by the first RNC, and service in the second area is controlled by a second RNC; serving the MS by the second RNC, so that the control of the MS is changed from the first RNC to the second RNC; determining by the second RNC whether the location update is needed based on factors such as configuration of the CN which is connected to the plurality of RNCs and/or the types of connection that the MS is having, etc.; and sending update of the location of the MS by the second RNC to a new idle CN entity (an idle CN entity is a CN entity which does not have an active connection for that particular MS) via an interface between the SRNC and the new CN entity. The CN entity can be a MSC/VLR (Mobile Switching Center/Visitor Location Register) or a SGSN (Serving GPRS Support Node, GPRS is General Packet Radio System). Alternatively, the CN entity determines whether the location update is

needed. If the location update is needed, the RNC then sends the location update to the new CN entity via the interface between the SRNC and the new CN entity.

In an additional embodiment of the present invention, a notification to the MS can also be triggered by the CN entity (for example MSC/VLR or SGSN, etc.), i.e. the CN entity initiates ordering of a location update procedure from MS. This scheme includes the following steps of: serving the MS by a first RNC; moving the MS from a first area to a second area wherein service in the first area is controlled by the first RNC, and service in the second area is controlled by a second RNC; serving the MS by the second RNC, the plurality of RNCs being connected to the CN, so that the control of the MS is changed from the first RNC to the second RNC; determining by the CN entity whether the location update is needed base on factors such as configuration of the CN and/or the types of connection that the MS is having, etc.; notifying, by the CN entity, the MS that a location update from the MS should be performed; and updating a location of the MS in the CN. Alternatively, after receiving a notification from the CN entity, it is up to the MS to decide whether the location update should be performed.

In an additional alternative embodiment of the present invention, an update of the location of the MS from an active connection CN entity to a new idle CN entity via an interface between the active connection CN entity and the new idle CN entity when there is a Serving Radio Network Controller (SRNC) relocation. The scheme includes the following steps of: serving the MS by a first RNC; moving the MS from a first area to a second area wherein service in the first area is controlled by the first RNC, and service in the second area is controlled by a second RNC; serving the MS by the second RNC, the plurality of RNCs being connected to the CN, so that the control of the MS is changed from the first RNC to the second RNC; determining by the active connection CN entity whether the location update is needed based on factors such as configuration of the CN which is connected to the plurality of RNCs and/or the types of connection that the MS is having, etc.; and sending update of the location of the MS by the active connection CN entity to the new idle CN entity via an interface between the active connection CN entity and the new idle CN entity. The CN entity can be a MSC/VLR (Mobile Switching Center/Visitor Location Register) or a SGSN (Serving GPRS Support Node, GPRS is General Packet Radio System). Alternatively,

the new idle CN entity determines whether the location update is needed. If the location update is needed, the active connection CN entity then sends the location update to the new idle CN entity via the interface between the active connection CN entity and the new idle CN entity.

5 In a further additional alternative embodiment of the present invention, a SRNC only moves Radio Resource (RR) control into a new RNC (i.e. a second RNC), and an old CN entity (i.e. the active CN entity before changing the RNC) remains control in the Core Network (CN), i.e. the old CN entity is still active after changing the RNC. The control in the CN is changed along with the location update from the
10 MS. Accordingly, without updating from the MS, the old CN entity is active, and the control in the CN is anchored. In this case, the scheme for providing an update to a new CN entity includes the following steps: serving the MS by a first RNC; moving the MS from a first area to a second area, wherein service in the first area is controlled by the first RNC, and service in the second area controlled by a second RNC; a
15 plurality of RNCs being connected to the CN so that the control of the MS is changed to from the first RNC to the second RNC; notifying the MS on the RNC change; and sending update of the location of the MS by the MS into the new and old CN entities.

In the above and many other embodiments, the Core Network entity can be a Mobile Switching Center/Visitor Location Register (MSC/VLR) which serves the
20 Circuit Switched (CS) connections, or a Serving GPRS Support Node (SGSN) which serves the Packet Switched (PS) connections, or an Interworking Unit/SGSN (IWU/SGSN) which serves PS connections in 3G CN entity interworking with 2G CN entity. 3G stands for the 3rd generation cellular system, and 2G stands for the 2nd generation cellular system.

25 Further in one embodiment of the present invention, a CN entity receiving location update of the MS may serve both an old RNC and a new RNC. In an alternative embodiment, the old RNC and the new RNC are served by different CN entities.

The present invention also provides a mobile telecommunication system. In
30 one embodiment, the system comprises: a Mobile Station (MS); and at least two Radio Network Controllers (RNCs), at least one of the RNCs being arranged to send a

notification to the MS in a response to a RNC relocation between the at least two RNCs.

In another embodiment of the present invention, the system comprises: a Mobile Station (MS); at least two Radio Network Controllers (RNCs); and a Core
5 Network (CN), the CN including at least one CN entity, at least one of the RNCs being arranged to send location update of the MS to the one CN entity via an interface between at least one RNC and at least one CN entity in a response to a RNC relocation between the at least two RNCs.

In an additional embodiment of the present invention, the system comprises:
10 a Mobile Station (MS); at least two Radio Network Controllers (RNCs); and a Core Network (CN), the CN including at least one CN entity, the at least one CN entity being arranged to send a notification to the MS in a response to a RNC relocation between the at least two RNCs.

In a further embodiment of the present invention, the system comprises: a
15 Mobile Station (MS); at least two Radio Network Controllers (RNCs); and a Core Network (CN), the CN including at least one CN entity, the at least one CN entity being arranged to send location update of the MS to a second CN entity via an interface between two CN entities in a response to a RNC relocation between the at least two RNCs.

20 The present invention further provides schemes for providing an inter CN entity handover, such as inter-SGSN handover, in a 3rd generation cellular system, whereby one of the SGSNs is a 2G SGSN or 3G SGSN, and the other one of the SGSNs is a 2G SGSN or 3G SGSN. This is accomplished by firstly determining whether both of the SGSNs are 2G SGSN or 3G SGSN or whether one is 2G SGSN
25 and the other is 3G SGSN, and secondly operating the corresponding inter-SGSN handover.

One advantage of the present invention is that it allows the location update of the MS to be sent to a correct CN entity in a 3rd generation cellular system where there is a Serving RNC relocation.

30 Another advantage of the present invention is that it allows an inter CN entity handover, such as inter-SGSN handover, in a 3rd generation cellular system whereby the radio related entities in RNCs, BSs, and MSs, etc., are maintained during the inter-

SGSN handover. The new SGSN receives all information from the old SGSN while establishing the new SRNC during a RNC relocation.

Other embodiments to implement a method or procedure in accordance with the present invention may include alternative or optional additional aspects. These and various other advantages and features of novelty which characterize the invention are pointed out with particularity in the claims annexed hereto and form a part hereof. However, for a better understanding of the invention, its advantages, and the objects obtained by its use, reference should be made to the drawings which form a further part hereof, and to accompanying descriptive matter, in which there are illustrated and described specific examples of an apparatus in accordance with the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

Referring now to the drawings in which like reference numbers represent corresponding parts throughout:

Fig. 1 illustrates a basic, generic mobile telecommunication system;

Fig. 2 illustrates a basic, generic handover process where radio signals are passed as a vehicle or mobile unit moves from one area to another;

Fig. 3 illustrates a Serving RNC connected to CN entities in a 3rd generation cellular system in accordance with the present invention;

Fig. 4 illustrates an inter-SGSN handover in a mobile telecommunication system in accordance with the principles of the present invention;

Fig. 5 illustrates a block diagram of a change of control in a Core Network (CN) triggered by a change of Serving Radio Network Controller (SRNC) (i.e. RNC relocation) in a 3rd generation cellular system in accordance with the principles of the present invention;

Fig. 6 illustrates an anchoring procedure when Mobile Station (MS) moves from one area to another;

Fig. 7 illustrates a floating procedure when Mobile Station (MS) moves from one area to another;

Fig. 8 illustrates a Mobile Station (MS) having at least one CS connection connected to a MSC/VLR before the MS moves into a second area in a 3rd generation cellular system in accordance with the principles of the present invention;

Fig. 9 illustrates a MS having at least one CS connection connected to a MSC/VLR after the MS moves into a second area in a 3rd generation cellular system in accordance with the principles of the present invention;

Fig. 10 illustrates a MS having at least one PS connection connected to a SGSN before the MS moves into a second area in a 3rd generation cellular system in accordance with the principles of the present invention;

Fig. 11 illustrates a MS having at least one PS connection connected to a SGSN after the MS moves into a second area in a 3rd generation cellular system in accordance with the principles of the present invention;

Fig. 12 illustrates an inter-SGSN handover from a 3G SGSN to a 3G SGSN in a 3rd generation cellular system in accordance with the principles of the present invention;

Fig. 13 illustrates an inter-SGSN handover from a 2G SGSN to a 2G SGSN in a 3rd generation cellular system in accordance with the principles of the present invention;

Fig. 14 illustrates an inter-SGSN handover from a 3G SGSN to a 2G SGSN in a 3rd generation cellular system in accordance with the principles of the present invention;

Fig. 15 illustrates an inter-SGSN handover from a 2G SGSN to a 3G SGSN in a 3rd generation cellular system in accordance with the principles of the present invention;

Fig. 16 illustrates a separate implementation of a Core Network (CN);

Fig. 17 illustrates an integrated implementation of a Core Network (CN); and

Fig. 18 illustrates an alternative inter-SGSN handover from a 3G SGSN to a 3G SGSN in a 3rd generation cellular system in accordance with the principle of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

In the following description of the exemplary embodiment, reference is made to the accompanying drawings which form a part hereof, and in which is shown by way of illustration the specific embodiment in which the invention may be practiced. It is to be understood that other embodiments may be utilized as structural changes

may be made without departing from the principles or scope of the present invention.

The present invention provides a notification to a Mobile Station (MS) to initiate a location update in a 3rd generation system. Further, the present invention provides update of location of the MS to a new Core Network (CN) entity via interface between the CN entities. Furthermore, the present invention provides update of location of the MS to a new CN entity via interface between a CN entity and a Serving RNC (SRNC). Moreover, the present invention provides an inter Core Network (CN) handover, e.g. inter-SGSN handover, in a 3rd generation cellular system.

Fig. 1 illustrates a basic, generic mobile telecommunication system 100. The system 100 can be connected by blocks. The voice fed to the microphone of a handset 110 is transmitted through atmosphere media 112 to a Base Station (BS) 114. From the BS 114, a signal is routed to a network, such as Public Switched Telephone Network (PSTN), or a Packet Data Network (PDN), via a switching center 116 and or rebroadcast 118. Similarly, at the network end, voice information is transmitted from a BS 120 and received by a handset 122. Each handset 110, 112 and BS 114, 120 have a transmitter/receiver (transceiver) function commonly known to a person skilled in the art.

In a 3rd generation cellular network, multiple Base Stations (BSs) can receive radio signals from a Mobile Station. Due to macro diversity and Iur-interface, the BSs are not necessarily controlled by one Radio Network Controller (RNC). When a Mobile Station (MS) moves from one area to another, radio signals may be passed from one area to another. This pass is often called handoff or handover. Fig. 2 illustrates a simple, basic handover process 200. As a vehicle 210, a MS, moves away from BS 212, its signal strength decreases. The BS 212 monitors the signal strength within the duration of the call. When the signal strength falls below a predetermined threshold level, the network 214 asks all predetermined candidates neighboring BS 220 to report the signal strength of the mobile in the vehicle 210. If the signal strength in the neighboring cell 220 was stronger by a predetermined amount, the network 214 attempts to handover the call to the candidate neighboring

cell 220. These elements are integrated to form a part of a ubiquitous coverage radio system that can connect to Public Switched Telephone Network (PSTN) 240.

Fig. 3 illustrates a Serving RNC (SRNC) connected to CN entities, such as MSC/VLR or a SGSN, in a 3rd generation cellular system in accordance with the present invention. The MSC/VLR serves MS' requests for Circuit Switched (CS) connections. Accordingly, the MSC/VLR is generally communicated to a network such as PSTN, etc.. The SGSN serves MS' requests for Packet Switched (PS) connections. Accordingly, the SGSN is generally communicated to a network such as Packet Data Network (PDN), e.g. Internet Protocol (IP), etc.

Fig. 4 illustrates an inter Core Network (CN) entity handover 400, for example, inter-SGSN handover in a 3rd generation cellular system in accordance with the present invention. Inter-SGSN handover is a handover between two SGSN network entities 402, 404 when a Mobile Station 405 moves from one area to another. The details of the inter-SGSN handover will be explained later in Figs. 12-15. During an inter-SGSN handover, a SRNC may change from an old SRNC 406 to a new SRNC 408 as shown in Fig. 4. It is appreciated that since a SRNC can be connected to a number of SGSNs, sometimes there may not be a SRNC relocation.

Fig. 5 illustrates a block diagram of a change of control and Mobile Station related data in a Core Network (CN) triggered by a change of Serving Radio Network Controller (SRNC) (i.e. RNC relocation) 500 in a 3rd generation cellular system in accordance with the principles of the present invention. There are several methods of initiating a location update of a MS. In one case, the MS has a Circuit Switched (CS) connection but not a Packet Switched (PS) connection. The change of serving RNC from RNC1 to RNC2 triggers update of the location of the MS to an idle (also called no connection) Core Network (CN) entity, such as SGSN, connected to RNC2 in box 502. There are at least four types of notification/updating the location of the MS. The first one is that the CN entity MSC1 (Mobile Switching Center) triggers location update in the network in box 504 by notifying the MS by sending the MS a message that location update should be performed, if necessary, in box 506. The second one is that the CN entity MSC1 triggers location update in the network in box 504 by updating the location of the MS to a new idle network entity, such as SGSN, via MSC/SGSN interface in box 508. The third one is that the RNC2

triggers location update of the MS in the network in box 512 by notifying the MS by sending the MS a message that location update should be performed, if necessary, in box 506. The fourth one is that the RNC2 triggers location update of the MS in the box 512 by updating the location of the MS to a new idle network entity, such as
5 SGSN, via RNC/SGSN interface in box 510.

In a second case, the MS has a Packet Switched (PS) connection but not a Circuit Switched (CS) connection. The change of serving RNC from RNC1 to RNC2 triggers control change of the packet switch connection to the SGSN connected to the RNC2 and also may trigger update of the location of the MS to an
10 idle Core Network (CN) entity, such as MSC, connected to RNC2 in box 514. There are at least four types of notification/updating the location of the MS. The first one is that the CN entity SGSN 2 (Serving GPRS Support Node, GPRS is referred to as General Packet Radio System) triggers location update in the network in box 516 by notifying the MS by sending the MS a message that location update should be
15 performed, if necessary, in box 518. The second one is that the CN entity SGSN 1 triggers location update in the network in box 516 by updating the location of the MS to a new idle network entity, such as MSC, via SGSN/MSC interface in box 520. The third one is that the RNC2 triggers location update of the MS in the network in box 524 by notifying the MS by sending the MS a message that location
20 update should be performed, if necessary, in box 518. The fourth one is that the RNC2 triggers location update of the MS in the box 524 by updating the location of the MS to a new idle network entity, such as MSC, via RNC/MSC interface in box 522.

In a third case, the MS has both a Packet Switched (PS) connection and a
25 Circuit Switched (CS) connection as shown in Fig. 5. The location update notification and/or update procedures can be the same as in the second case described above, see from box 514 to box 522, except that it may not trigger update of the location to an idle Core Network (CN) entity, such as MSC, connected to RNC2 in box 514.

30 It is appreciated that whether the trigger function is performed may depend on factors such as configuration of the CN and/or the types of connection that the MS is having, etc.

After changing control of the SRNC, the SRNC may determine whether a location update is necessary. It is appreciated that after the MS receives a notification, the MS may also decide whether a location update should be made. The conditions for when the notification to the MS is needed may depend on the CN configuration and/or the types of connection that the MS is having, etc.. CN may have a single Mobility Management (MM) control plane or C-planes (known as an integrated implementation as shown in Fig. 17) or a number of control planes (known as a separated implementation as shown in Fig. 16). In the single C-plane CN, an anchoring operation can be performed when the SRNC is changed. In the multiple C-planes CN, a floating operation can be performed when the SRNC is changed. As a result, there is no need for notification to the MS in the CN with an integrated implementation.

Fig. 16 illustrates a separate implementation. In one embodiment, the CN entities, e.g. MSC and SGSN, are not linked. In another embodiment, the CN entities, e.g. MSC and SGSN, are linked.

Fig. 17 illustrates an integrated implementation. The CN entities, e.g. MSC and SGSN, are integrated in the implementation.

The following table shows the conditions on which SRNC's determination is based:

| | Target RNC "1" | Target RNC "2" |
|----------------|-----------------|----------------|
| Source RNC "1" | No notify to MS | Notify to MS |
| Source RNC "2" | Notify to MS | Notify to MS |

The numbers "1" and "2" refer to the number of C-planes. For an integrated implementation, the number "1" is used; whereas for a separated implementation (here using two control planes as an example), the number "2" is used. Accordingly, the configuration of CN may affect the need for notification of MS to initiate a location update.

The SRNC may include an indicator, such as a flag, to indicate the number of lu-links to a message that initiates RNC relocation. Once the SRNC determines to notify the MS, the notification to the MS itself contains an ID, e.g. RNC ID or location area ID, to ensure the MS to choose a correct location area for location

update. The MS at the recipient end provides a chosen cell or BS to the CS MM or PS MM in the CN. The chosen cell has the same RNC ID or location area ID as that provided by the SRNC in the notification.

- 5 In the CS MM or PS MM registration procedure, i.e. MS location update procedure, the Mobility Management (MM) procedures that are allowed in various CS/PS states that the MS has, are shown in the following table:

| | PS non-attached | PS attached | PS active |
|-----------------|-----------------------------------|---------------------------------------------|---------------------------------|
| CS non-attached | CS attach or PS attach | CS attach, or PS LU, or PS detach | CS attach |
| CS attached | CS detach, or CS LU, or PS attach | CS LU, or CS detach, or PS LU, or PS detach | CS LU ¹ or CS detach |
| CS active | PS attach | PS LU ² or PS detach | None |

LU^{1,2}: Location update may only be performed on CN initiated notification.

- 10 In the table, PS active or CS active refers to that the MS has an ongoing a PS connection or a CS connection. CS non-attached or PS non-attached refers to that the MS is absent from the system. CS attached or PS attached refer to that the MS is seen as present by the CN, and the CN is able to reach the MS via paging. Also, the MS will perform location updates when necessary in CS/PS attached state.

- 15 When there is a change of Serving RNC (SRNC), a RNC relocation procedure is performed. Also, when a notification to the MS is initiated by the CN, the SRNC provides in a RNC-relocation procedure together with other parameters the number of the Iu-links, which are to be relocated in the RNC-relocation procedure. The network entity, e.g. MSC/VLR, SGSN (also known as PDAN, Packet Data Access Node), or IWU/SGSN (Interworking SGSN), decides a notification that it is going to send to the MS based on the following table:

| | MSC/VLR | SGSN or IWU/SGSN |
|-----------|-----------------------------|-----------------------------|
| 1 Iu-link | If PS attached, order PS-LU | If CS attached, order CS-LU |
| 2 Iu-link | -- | -- |

- 20 ^{1,2} refer to the number of active Iu-links for a Mobile Station.

The CN MM, e.g. CS MM or PS MM, can then request location updates (LUs) e.g. by sending a MM information message to the MS. The MM information message may indicate the LU type, e.g. PS-LU or CS-LU, which the MS can perform. This location update procedure enables service from the new network entities when the MS has a connection in the 3rd generation cellular system.

As mentioned above, a handover operation between the RNCs is accomplished in an SRNC relocation procedure. The following discussion on a SRNC-relocation procedure can be used in the present invention.

Generally, a handover procedure includes a serving RNC relocation procedure, a hard handover procedure, and a releasing resource procedure after a successful SRNC relocation. A SRNC relocation procedure is used to move UTRAN Core Network (UTRAN -- Universal Mobile Telecommunication System (UMTS) Radio Access Network) connection point at RAN (Radio Access Network) side from one RNC to another. In the procedure, macrodiversity combination points of a user plane are handled by a UTRAN control plane connection, and the Iu links are relocated. An initial condition for the SRNC relocation procedure may be that all the branches or most of the branches used for the corresponding MS are controlled by the target RNC.

The SRNC relocation procedure is initiated by the SRNC. The procedure is initiated by sending a RANMAP (Radio Access Network Mobile Application Part) message "RELOCATION REQUIRED". The RELOCATION REQUIRED message generally contains a target RNC identity (RNC ID), a relocation/hard handover indicator, and a UTRAN information field. The UTRAN information field is a transparent field for the Core Network (CN) that is to be forwarded to a target RNC. Relocation/Hard handover indicator indicates whether this message is used to initiate a SRNC relocation or a hard handover procedure.

When the "RELOCATION REQUIRED" message is received at a network entity, e.g. MSC or SGSN, part of RANMAP activities are suspended. Having suspended RANMAP, the MSC or SGSN sends a "RELOCATION REQUEST" message to the target RNC. The "RELOCATION REQUEST" message generally contains a UTRAN information field, a relocation/hard handover indicator, and binding identifiers for Iu-links to be established.

Then, the SRNC performs admission control procedures for the new MS in which the SRNC establishes all necessary protocol entities and sets the established protocol entities into initial states. The SRNC then prepares for switching all the Iu-links connections from the old Iu-links to the new intra RNC connection. When all
5 intra RNC procedures are executed and when the new Iu-links are established by the MSC or SGSN, the SRNC acknowledges its readiness for the SRNC relocation by sending a "RELOCATION PROCEEDING" message to the MSC or SGSN. The "RELOCATION PROCEEDING" message indicates to the MSC or SGSN the required switching mode for each Iu link.

10 After the reception of the "RELOCATION PROCEEDING" message, the MSC or SGSN checks from the received message which Iu-links should be connected to a data duplication mode. The MSC or SGSN then establishes multipoint to point connections for all uplink Iu-links by connecting corresponding old and new Iu-links into the same link entity. Similarly, the MSC or SGSN starts
15 duplicating data from the old Iu-links to the corresponding new links. When all indicated Iu-links are connected, the MSC or SGSN sends a "RELOCATION PROCEEDING" message to the target RNC.

When the SRNC receives the "RELOCATION PROCEEDING" message, the SRNC relocation procedure is executed. First, the target RNC finds feasible
20 time instance for the execution and at the moment the target RNC starts to act as a SRNC. At that time point, the SRNC starts downlink data transmission to the Base Stations (BSs) and all Uplink (UL) links are switched from the Iur to the new corresponding Iu-links. After completion of the relocation procedure, the SRNC completes the procedure by sending a "RELOCATION COMPLETE" message to
25 the MSC or SGSN.

When the MSC or SGSN receives the "RELOCATION COMPLETE" message, the MSC or SGSN executes Iu-link release procedures for old Iu-links, which in turn causes execution of releasing corresponding Iur connections by the source RNC.

30 The hard handover procedure is used to move the URAN-CORE NETWORK connection point at RAN side from one RNC to another in such cases when Iur cannot – or is not wanted to-- be used between the source and target RNCs.

In a hard handover procedure, the MS is involved, and the MS determines the execution time for the hard handover procedure by making an access to the new radio resources.

The hard handover procedure is also initiated by a SRNC. The procedure is initiated by sending a RANMAP (Radio Access Network Mobile Application Part) "RELOCATION REQUIRED". The "RELOCATION REQUIRED" message generally contains a target RNC identity, a relocation/hard handover indicator, and a URAN information field. The URAN information field is a transparent field for the CN that is to be forwarded to the target RNC. The relocation/hard handover indicator indicates whether to initiate a SRNC relocation or a hard handover procedure.

When a "RELOCATION REQUIRED" message is received at a network entity, e.g. MSC or SGSN, part of RANMAP activities are suspended. Having suspended RANMAP, the MSC or SGSN sends a "RELOCATION REQUEST" message to a target RNC. The "RELOCATION REQUEST" message generally contains a URAN information field, a relocation/hard handover indicator, and binding identifiers for Iu links to be established.

Then, the SRNC performs admission control procedures for the new MS in which the serving RNC establishes all necessary protocol entities and sets the established protocol entities into initial states. Next, the SRNC prepares for switching all the Iu-links connections from the old Iur to the new intra RNC connection. The SRNC also allocates radio resources for the new MS. The SRNC then packs this radio resource information into a new RAN information field to be transmitted to the source RNC via the MSC or SGSN. When all intra RNC procedures are executed and when the new Iu-links are established by the MSC or SGSN, the SRNC acknowledges its readiness for the hard handover by sending a "RELOCATION PROCEEDING" message to the MSC or SGSN. The "RELOCATION PROCEEDING" message indicates to the MSC or SGSN the required switching mode for each Iu-link.

After reception of the "RELOCATION PROCEEDING" message, the MSC or SGSN checks from the received message which Iu-links should be connected to a data duplication mode. Then, the MSC or SGSN establishes multipoint to point

connections for all uplink Iu-links by connecting corresponding old and new Iu links into the same link entity. Similarly, the MSC or SGSN starts duplicating the data from old Iu-links to the corresponding new links. When all indicated Iu-links are connected, the MSC or SGSN sends a "RELOCATION PROCEEDING" message to the target RNC and a "HANDOVER COMMAND" message to the source RNC. The "HANDOVER COMMAND" message contains the RAN Information Field produced by the target RNC.

When the source RNC receives the "HANDOVER COMMAND" message, the source RNC sends corresponding information to the MS, which makes the handover accessible to the new RNC.

When the target RNC detects the MS accessible to the allocated resource, the target RNC immediately starts to act as a SRNC. At that time point, the SRNC starts downlink data transmission to the BSs and all UL links are switched from the Iur to the new corresponding Iu-links. After completion of all relocation procedures, the SRNC completes the procedure by sending a "RELOCATION COMPLETE" message to the MSC or SGSN.

When MSC or SGSN receives the "RELOCATION COMPLETE" message, the MSC or SGSN executes Iu-link release procedures for the old Iu-links, which in turn causes execution of releasing of the corresponding Iur connections by the source RNC.

Resource release procedure may generally be required because of a SRNC relocation being completed on another RNC. The resources at the old RNC can be released by the MSC or SGSN by using a commonly adopted resource releasing procedure which is not discussed in details herewith. It is appreciated that any suitable resource releasing procedure can be adopted without departure from the principles of the present invention.

Fig. 8 illustrates a Mobile Station (MS) having at least one CS connection connected to a MSC/VLR before the MS moves into a second area in a 3rd generation cellular system in accordance with the principles of the present invention. The Iu-link is the interface between a RNC and a Core Network entity. The Iur-link is the interface between two RNCs. The Iub-link is the interface between a RNC

and a BS. Fig. 8 also illustrates that a SRNC is actively connected to a Core Network entity, a MSC/VLR. In this case, the MS has a CS connection.

Fig. 9 illustrates a MS having at least one CS connection connected to a MSC/VLR after the MS moves into a second area in a 3rd generation cellular system in accordance with the principles of the present invention. Since the control within the MSC/VLR is generally anchored after the relocation of the SRNC, the control still remains in the MSC/VLR 1 as shown in Fig. 9. This is also the reason why MSC 1 triggers the location update of the MS in the network as shown in box 504 in Fig. 5. On the other hand, MSC/VLR 1 can update the location of the MS to a new idle CN entity, such as SGSN via MSC/SGSN interface. In this case, after the update, PS MM 2 is the controlling MM entity as shown in Fig. 9.

Fig. 10 illustrates a MS having at least one PS connection connected to a SGSN before the MS moves into a second area in a 3rd generation cellular system in accordance with the principles of the present invention. A SRNC is actively connected to a Core Network entity, a SGSN. In this case, the MS has a PS connection.

Fig. 11 illustrates a MS having at least one PS connection connected to a SGSN after the MS moves into a second area in a 3rd generation cellular system in accordance with the principles of the present invention. The control within the SGSN is generally floating after the relocation of the SRNC, the control still moves in SGSN 2 along the move of the MS as shown in Fig. 9. It is appreciated that the control within the SGSN can be anchoring as well after the relocation of the SRNC, i.e. the control remains in the SGSN 1, similar to those shown in Fig. 9 which is not repeated. In a floating situation, SGSN 2 can trigger the location update of the MS in the network as shown in box 516 in Fig. 5. On the other hand, SGSN 2 can update the location of the MS to a new idle CN entity, such as MSC/VLR, via SGSN/MSC interface. In this case, after the update, CS MM 2 is the controlling MM entity as shown in Fig. 11.

The present invention also provides an inter CN entity handover, such as inter-SGSN handover, whereby one of the SGSNs is a 2G SGSN or 3G SGSN, and the other one of the SGSNs is a 2G SGSN or 3G SGSN. This is accomplished by firstly determining whether both of the SGSNs are 2G SGSN or 3G SGSN or whether

one is 2G SGSN and the other is 3G SGSN, and secondly operating the corresponding inter-SGSN handover. Fig. 12 illustrates an inter-SGSN handover from a 3G SGSN to a 3G SGSN in a 3rd generation cellular system in accordance with the principles of the present invention. The inter-SGSN handover procedure between 3G-3G is

5 generally described as follows:

1. If a SRNC relocation is requested, sending a "Relocation Required" message to the corresponding old network entity, e.g. old 3G SGSN.
2. The old 3G SGSN determines that a new RNC is under a new 3G SGSN, and thus sends a "PREPARE_SGSN_HO_REQUIRED" message to a
10 new 3G SGSN. This message includes all information about Iu-links, UTRAN, and old 3G SGSN which are to be established into the new 3G SGSN and the new RNC.
3. The new 3G SGSN sends the UTRAN information to the new RNC with a "RELOCATION REQUEST" message.
- 15 4. The new 3G SGSN sends an acknowledgment to the old 3G SGSN.
5. The old 3G SGSN forwards Downlink (DL) and Uplink (UL) data to the new 3G SGSN.
6. The new 3G RNC informs the new 3G SGSN that the new RNC is ready to receive data from the new 3G SGSN.
- 20 7. The new 3G SGSN updates the contexts of Packet Data Protocol (PDP).
8. The Packet Data Gateway (PDG) or Gateway GPRS Support Node (GGSN) of the PDP sends an acknowledgment to the new 3G SGSN.
9. The new 3G SGSN sends the DL data to the new RNC.
10. The new 3G SGSN sends a "PREPARE_SGSN_HO_COMPLETE"
25 message to the old 3G SGSN. When the old 3G SGSN receives the complete message, the old 3G SGSN clears all data belonging to the MS.
11. The new RNC detects the DL data, switches UL data, and sends a "RELOCATION COMPLETE" message to the new 3G SGSN.

Fig. 18 illustrates an alternative inter-SGSN handover from a 3G SGSN to a
30 3G SGSN in a 3rd generation cellular system in accordance with the principles of the present invention. The alternative inter-SGSN handover procedure between 3G-3G is generally described as follows:

1. If a SRNC relocation is requested, sending a "Relocation Required" message to the corresponding old network entity, e.g. old 3G SGSN.
2. The old 3G SGSN determines that a new RNC is under a new 3G SGSN, and thus sends a "PREPARE_SGSN_HO_REQUIRED" message to a new 3G SGSN. This message includes all information about Iu-links, URAN, and old 3G SGSN which are to be established into the new 3G SGSN and the new RNC.
3. The new 3G SGSN sends the URAN information to the new RNC with a "RELOCATION REQUEST" message.
4. The new 3G SGSN sends an acknowledgment to the old 3G SGSN.
5. The old 3G SGSN forwards Downlink (DL) and Uplink (UL) data to the new 3G SGSN.
6. The new 3G RNC informs the new 3G SGSN that the new RNC is ready to receive data from the new 3G SGSN.
7. The new 3G SGSN sends the DL data to the new RNC.
8. The new 3G SGSN sends a "PREPARE_SGSN_HO_COMPLETE" message to the old 3G SGSN. When the old 3G SGSN receives the complete message, the old 3G SGSN clears all data belonging to the MS.
9. The new RNC detects the DL data, switches UL data, and sends a "RELOCATION COMPLETE" message to the new 3G SGSN.
10. The MS receives notification that it needs to perform Location Update(LU) to the new 3G SGSN.
11. The MS sends the LU to the new 3G SGSN.
12. The new 3G SGSN updates the SGSN contexts from the old 3G SGSN.
13. The old 3G SGSN sends SGSN contexts to the new 3G SGSN.
14. The old 3G SGSN forwards data to the new 3G SGSN.
15. The new 3G SGSN updates PDP contexts.
16. The PDG or GGSN of the PDP sends an acknowledgment to the new 3G SGSN.
17. The new 3G SGSN sends a "LU_ACCEPT" message to the MS.

Referring back to Fig. 5, if the SRNC relocation is used as described in Fig. 18, then an update will be sent to the new SGSN by the MS after the Box 518. If the

SRNC relocation is used as described in Fig. 12, then no LU is sent to the new SGSN by the MS after the Box 518. In addition, in the case of Fig. 18, an update is sent to the new SGSN after the Box 522.

It is appreciated that many other suitable implementation can be used within the principles of the present invention generally shown in the above steps as one of the implementations. It is also appreciated that the sequence order of the above procedure can be varied in different implementations.

Fig. 13 illustrates an inter-SGSN handover from a 2G SGSN to a 2G SGSN in a 3rd generation cellular system in accordance with the principles of the present invention. The inter-SGSN handover procedure between 2G-2G is generally described as follows:

1. If a SRNC relocation is requested, sending a "Relocation Required" message to the corresponding Interworking Unit (old IWU).
2. The old IWU sends a "not" or "denial" acknowledgment message back to the SRNC with a cause that the CN entity is 2G SGSN. The SRNC releases all connection from the old RNC that belongs to the corresponding old 2G SGSN.
3. If the MS has simultaneous connections from MSC/VLR, the MS waits that the new RNC or MSC/VLR notifies the MS that it needs to perform Location Update (LU) to the new 2G SGSN.
4. The MS sends the LU to the new 2G SGSN.
5. The new 2G SGSN updates the SGSN contexts from the old 2G SGSN.
6. The old 2G SGSN sends SGSN contexts to the new 2G SGSN.
7. The old 2G SGSN forwards data to the new 2G SGSN.
8. The new 2G SGSN updates PDP contexts.
9. The PDG or GGSN of the PDP sends an acknowledgment to the new 2G SGSN.
10. The new 2G SGSN sends a "LU_ACCEPT" message to the MS.

It is appreciated that many other suitable implementation can be used within the principles of the present invention generally shown in the above steps as one of the implementations. It is also appreciated that the sequence order of the above procedure can be varied in different implementations.

Fig. 14 illustrates an inter-SGSN handover from a 3G SGSN to a 2G SGSN in a 3rd generation cellular system in accordance with the principles of the present invention. The inter-SGSN handover procedure between 3G-2G is generally described as follows:

- 5 1. If a SRNC relocation is requested, sending a "Relocation Required" message to corresponding old network entity, e.g. old 3G SGSN.
2. The old SGSN determines that a new RNC is under a new 2G SGSN, and thus sends a "not" or "denial" acknowledgment message to a new 2G SGSN. This message includes all information about Iu-links, URAN,
10 and old 3G SGSN which are to be established into the new 2G SGSN and the new RNC.
3. If the MS has simultaneous connections from MSC/VLR, the MS waits that the new RNC or MSC/VLR notifies the MS that it needs to perform Location Update (LU) to the new 2G SGSN.
- 15 4. The MS sends the LU to the new 2G SGSN.
5. The new 2G SGSN updates the SGSN contexts from the old 3G SGSN.
6. The old 3G SGSN sends SGSN contexts to the new 2G SGSN.
7. The old 3G SGSN forwards data to the new 2G SGSN.
8. The new 2G SGSN updates PDP contexts.
- 20 9. The PDG or GGSN of the PDP sends an acknowledgment to the new 2G SGSN.
10. The new 2G SGSN sends a "LU_ACCEPT" message to the MS.

It is appreciated that many other suitable implementation can be used within the principles of the present invention generally shown in the above steps as one of
25 the implementations. It is also appreciated that the sequence order of the above procedure can be varied in different implementations.

Fig. 15 illustrates an inter-SGSN handover from a 2G SGSN to a 3G SGSN in a 3rd generation cellular system in accordance with the principles of the present invention. The inter-SGSN handover procedure between 2G-3G is generally
30 described as follows:

1. If a SRNC relocation is requested, sending a "Relocation Required" message to the corresponding Interworking Unit (old IWU).

2. The old IWU sends a “not” or “denial” acknowledgment message back to the SRNC with a cause that the CN entity is 2G SGSN. The SRNC releases all connection from the old RNC that belongs to the corresponding old 2G SGSN.
- 5 3. If the MS has simultaneous connections from MSC/VLR, the MS waits that the new RNC or MSC/VLR notifies the MS that it needs to perform Location Update (LU) to the new 3G SGSN.
4. The MS sends the LU to the new 3G SGSN.
5. The new 3G SGSN updates the SGSN contexts from the old 2G SGSN.
- 10 6. The old 2G SGSN sends SGSN contexts to the new 3G SGSN.
7. The old 2G SGSN forwards data to the new 3G SGSN.
8. The new 3G SGSN updates PDP contexts.
9. The PDG or GGSN of the PDP sends an acknowledgment to the new 3G SGSN.
- 15 10. The new 3G SGSN sends a “LU_ACCEPT” message to the MS.

It is appreciated that many other suitable implementation can be used within the principles of the present invention generally shown in the above steps as one of the implementations. It is also appreciated that the sequence order of the above procedure can be varied in different implementations.

- 20 The foregoing description of the exemplary embodiment of the invention has been presented for the purposes of illustration and description. It is not intended to be exhaustive or to limit the invention to the precise form disclosed. Many modifications and variations are possible in light of the above teaching. It is intended that the scope of the invention be limited not with this detailed description,
- 25 but rather by the claims appended hereto.

WHAT IS CLAIMED IS:

1. A method for providing a notification to a Mobile Station (MS) for a location update of the MS in a mobile telecommunication system wherein the MS is controllable by one of a plurality of Radio Network Controllers
5 (RNCs), comprising the steps of:
 - a) serving the MS by a first RNC;
 - b) moving the MS from a first area to a second area wherein service in the first area is controlled by the first RNC, and service in the second area is controlled by a second RNC;
 - 10 c) serving the MS by the second RNC, so that control of the MS is changed from the first RNC to the second RNC; and
 - d) notifying, by the second RNC, the MS that a location update from the MS should be performed.
2. A method of claim 1, further comprising a step of updating location
15 of the MS to a Core Network entity.
3. A method for providing a notification to a Mobile Station for a location update of the MS in a mobile telecommunication system wherein the MS is controllable by one of a plurality of Radio Network Controllers (RNCs), comprising the steps of:
20
 - a) serving the MS by a first RNC;
 - b) moving the MS from a first area to a second area wherein service in the first area is controlled by the first RNC, and service in the second area is controlled by a second RNC;
 - c) serving the MS by the second RNC, so that control of the MS is changed
25 from the first RNC to the second RNC; and
 - d) updating, by the second RNC, a network entity in the CN for a location update of the MS.
4. A method for providing a notification to a Mobile Station for a location update of the MS in a mobile telecommunication system wherein the MS is

controllable by one of a plurality of Radio Network Controllers (RNCs), comprising the steps of:

- a) serving the MS by a first RNC;
- b) moving the MS from a first area to a second area wherein service in the first area is controlled by the first RNC, and service in the second area is controlled by a second RNC;
- c) serving the MS by the second RNC, the plurality of RNCs being connected to a Core Network (CN), so that control of the MS is changed from the first RNC to the second RNC; and
- d) notifying, by the CN, the MS for a location update from the MS.

5. A method of claim 4, further comprising a step of updating location of the MS to a Core Network entity.

6. A method for providing a notification to a Mobile Station for a location update of the MS in a mobile telecommunication system wherein the MS is controllable by one of a plurality of Radio Network Controllers (RNCs), comprising the steps of:

- a) serving the MS by a first RNC;
- b) moving the MS from a first area to a second area wherein service in the first area is controlled by the first RNC, and service in the second area is controlled by a second RNC;
- c) serving the MS by the second RNC, the plurality of RNCs being connected to a Core Network (CN), so that control of the MS is changed from the first RNC to the second RNC; and
- d) updating, by the CN, a network entity in the CN for a location update of the MS.

7. A method for of controlling a service provided to a Mobile Station (MS) in a mobile telecommunication system having a Radio Access Network (RAN) and a Core Network (CN), the RAN comprising a plurality of Base Stations (BSs) and a plurality of Radio Network Controllers (RNCs), each of the RNCs controlling at least one of the BSs, the method comprising the steps of:

- 5 a) establishing an active connection for a service from a first CN entity;
 b) controlling a radio connection of one of the MS by one first RNC during
 the active connection;
 c) changing control of the radio connection to one second RNC; and
 d) triggering a service management function in at least one CN entity
 connected to the second RNC.

8. A method according to claim 7, wherein the CN comprises at least a
second CN entity providing a second service and being in an idle state, wherein the
service management function is a function updating a location of the MS to the
10 second CN entity.

9. A method according to claim 8, wherein both the first and second
RNCs are connected to one same CN entity.

10. A method according to claim 8, wherein the location of the MS is
updated by sending a notification from the second RNC to the idle CN entity.

15 11. A method according to claim 8, wherein the location of the MS is
updated by sending the MS a notification requesting the MS to initiate the location
update to the idle CN entity.

12. A method according to claim 7, wherein the service management
function moves the control of the active connection to a second CN entity.

20 13. A method according to claim 11, further providing a packet switched
service, wherein a control of an active packet switched connection is moved to a
second CN entity.

14 A method of providing an inter Core Network (CN) entity handover in
a 3rd generation cellular system, comprising the steps of:

25 a) requesting a serving RNC; and

- b) determining whether the serving RNC is associated with a different CN entity, if yes, initiating the inter CN entity handover.

15 15 The method of claim 14, wherein initiating the inter CN entity handover is a handover from a 3G SGSN to a 3G SGSN.

5 16 The method of claim 14, wherein initiating the inter CN entity handover is a handover from a 2G SGSN to a 2G SGSN.

17. The method of claim 14, wherein initiating the inter CN entity handover is a handover from a 3G SGSN to a 2G SGSN.

10 18. The method of claim 14, wherein initiating the inter CN entity handover is a handover from a 2G SGSN to a 3G SGSN.

19. A mobile telecommunication system, comprising:

- a) a Mobile Station (MS); and
 - b) at least two Radio Network Controllers (RNCs), at least one of the RNCs being arranged to send a notification to the MS in a response to a RNC relocation between the at least two RNCs.
- 15

20. A mobile telecommunication system, comprising:

- a) a Mobile Station (MS);
 - b) at least two Radio Network Controllers (RNCs); and
 - c) a Core Network (CN), the CN including at least one CN entity, at least one of the RNCs being arranged to send location update of the MS to the one CN entity via an interface between at least one RNC and at least one CN entity in a response to a RNC relocation between the at least two RNCs.
- 20

21. A mobile telecommunication system, comprising:

- a) a Mobile Station (MS);
 - b) at least two Radio Network Controllers (RNCs); and
- 25

- c) a Core Network (CN), the CN including at least one CN entity, the at least one CN entity being arranged to send a notification to the MS in a response to a RNC relocation between the at least two RNCs.

22. A mobile telecommunication system, comprising:

- 5 a) a Mobile Station (MS);
- b) at least two Radio Network Controllers (RNCs); and
- c) a Core Network (CN), the CN including at least one CN entity, the at least one CN entity being arranged to send location update of the MS to a second CN entity via an interface between two CN entities in a response to
10 a RNC relocation between the at least two RNCs.

23. A method for providing a notification to a Mobile Station (MS) for a location update of the MS in a mobile telecommunication system wherein the MS is controlled by one of a plurality of Radio Network Controllers (RNCs), which comprising:

- 15 a) serving the MS by a first RNC;
- b) moving the MS from a first area to a second area wherein service in the first area is controlled by the first RNC, and service in the second area is controlled by a second RNC;
- c) serving the MS by the second RNC, the plurality of RNCs being
20 connected to a Core Network (CN) which has a plurality of CN entities including one active CN entity, so that control of the MS is changed from the first RNC to the second RNC; and
- d) notifying the MS that the control of the MS has been changed from the first RNC to the second RNC and that the location update of the MS should be
25 performed.

24. The method of claim 23, wherein the active CN entity is connected to the first RNC.

25. The method of claim 23, wherein the active CN entity is connected to the second RNC.

26. The method of claim 23, further comprising sending the location update of the MS by the MS to the plurality of CN entities.

27. The method of claim 23, wherein notifying the MS is made by the MS.

5 28. The method of claim 23, wherein notifying the MS is made by the second RNC.

29. The method of claim 23, wherein notifying the MS is made by the active CN entity.

30. A method of mobility management in a mobile telecommunication system including a mobile station (MS), a radio network having a plurality of radio network controllers (RNCs) controlling use of radio resources and including a serving RNC, and a plurality of core network entities (CNEs) each of which connects to at least one of the RNCs, the MS having at least one type of connection connected to the CNEs, the CNEs storing information of a current location of the MS and connecting at least a first type of connections of the MS to a second network and a second MS of the mobile telecommunication system, and a radio connection of the MS being controlled by the serving RNC, and the connection of MS being routed to/from a respective CNE via the serving RNC, the method comprising:

controlling the mobile station (MS) by a first RNC of the plurality of RNCs, the first RNC being the serving RNC;

moving control of the MS to a second RNC according to a predefined criteria, service in a first area being controlled by the first RNC, and service in a second area being controlled by the second RNC when the MS is moved from the first area to the second area, the second RNC being the serving RNC; and

25 updating location of the MS to the CNE connected to the second RNC.

31. A method according to claim 30, wherein the updating step comprises the steps of notifying the MS that the control of the radio connection of the MS has

been moved to the second RNC, and the MS sending a location update upon receiving notification.

32. A method according to claim 31, wherein the MS is notified that the control of the radio connection of the MS is moved to the second RNC by the second
5 RNC.

33. A method according to claim 31, wherein the MS is notified that the control of the radio connection of the MS is moved to the second RNC by one of the CNEs.

34. A method according to claim 30, wherein location of the MS is
10 updated to the CNE connected to the second RNC by the second RNC.

35. A method according to claim 30, wherein the mobile telecommunication system having at least two different types of CNEs, the location of the MS is updated to a second type of the CNE connected to the second RNC by a first type of the CNE controlling the first type connection of the MS.

15 36. A method according to claim 30, wherein the first RNC is connected to a first one of the CNEs, the second RNC is connected to a second one of the CNEs, when the location of the MS is updated to the second CNE, the control of the connection is moved from the first CNE to the second CNE.

20 37. A method according to claim 30, wherein the first RNC is connected to a first one of the CNEs, and the second RNC is connected to a second one of the CNEs, when the location of the MS is updated to the second CNE, the control of connection remains in the first CNE.

25 38. A method according to claim 30, wherein the mobile telecommunication system has at least two different types of CNEs, the MS has an active connection to a first type of the CNE which is connected to a first RNC and has no active connection to a second type of the CNE which is connected to the first

RNC, the location of the MS is updated to the second type of the CNE connected to the second RNC.

39. A method according to claim 30, wherein the mobile telecommunication system has at least two different types of CNEs, wherein the location of the mobile station is updated in at least two types of CNEs connected to the second RNC.

40. A radio access network for a mobile telecommunication system, comprising:
a mobile station (MS);
a radio access network including a plurality of radio network controllers (RNCs) controlling use of radio resources;
a plurality of core network elements (CNEs) each connected to at least one of the RNCs, the MS having at least one controlling CNE storing information on a current location of the MS and connecting at least a first type of connections of the MS to other networks and other mobile stations of the mobile telecommunication system, a radio connection of MS being controlled by a serving RNC and the connection of the MS being routed to/from a respective CNE via the serving RNC, the serving RNC functionality of the connection being moved from a first one of the RNCs to a second one of the RNCs in response to meeting a predefined criteria; and
wherein the radio access network is arranged to update a location of the MS to the CNE connected to the second RNC in response to having moved the control of the radio connection of the MS from the first RNC to the second RNC.

41. A radio access controller for a mobile telecommunication system, comprising:
a mobile station (MS);
a radio access network including a plurality of radio network controllers (RNCs) controlling use of radio resources;
a plurality of core network elements (CNEs) each connected to at least one RNC, the MS having at least one controlling CNE storing information on a current location of the MS and connecting at least a first type of connections of the MS to

other networks and other MSs of the mobile telecommunication system, a radio connection of MS being controlled by a serving RNC and the connection of the MS being routed to/from a respective CNE via the serving RNC, the serving RNC functionality of the connection being moved from a first one of the RNCs to a
5 second one of the RNCs in response to meeting a predefined criteria; and
wherein the radio access controller is arranged to update a location of the MS to the CNE connected to the second RNC in response to having moved the control of the radio connection of the MS from the first RNC to the second RNC.

42. A radio access network for a mobile telecommunication system,
10 comprising:
a mobile station (MS);
a radio access network including a plurality of radio network controllers (RNCs) controlling use of radio resources;
a plurality of core network elements (CNEs) each connected to at least one
15 RNC, the MS having at least one controlling CNE storing information on a current location of the MS and connecting at least a first type of connections of the MS to other networks and other mobile stations of the mobile telecommunication system, a radio connection of MS being controlled by a serving RNC and the connection of the MS being routed to/from a respective CNE via the serving RNC, the serving RNC
20 functionality of the connection being moved from a first one of the RNCs to a second one of the RNCs in response to meeting a predefined criteria; and
wherein the radio access network is arranged to send the MS a request to send a location update message in response to having moved the control of the radio connection of the MS from the first RNC to the second RNC.

25 43. A radio access controller for a mobile telecommunication system, comprising:
a mobile station (MS);
a radio access network including a plurality of radio network controllers (RNCs) controlling use of radio resources;

- core network elements (CNEs) each connected to at least one RNC, the MS having at least one controlling CNE storing information on a current location of the MS and connecting at least a first type of connections of the MS to other networks and other mobile stations of the mobile telecommunication system, a radio
- 5 connection of the MS being controlled by a serving RNC and the connection of the MS being routed to/from a respective CNE via the serving RNC, the serving RNC functionality of the connection being moved from a first one of the RNCs to a second one of the RNCs in response to meeting a predefined criteria; and
- wherein the radio network controller is arranged to send the MS a request to
- 10 send a location update message in response to having moved the control of the radio connection of the MS from the first RNC to the second RNC.

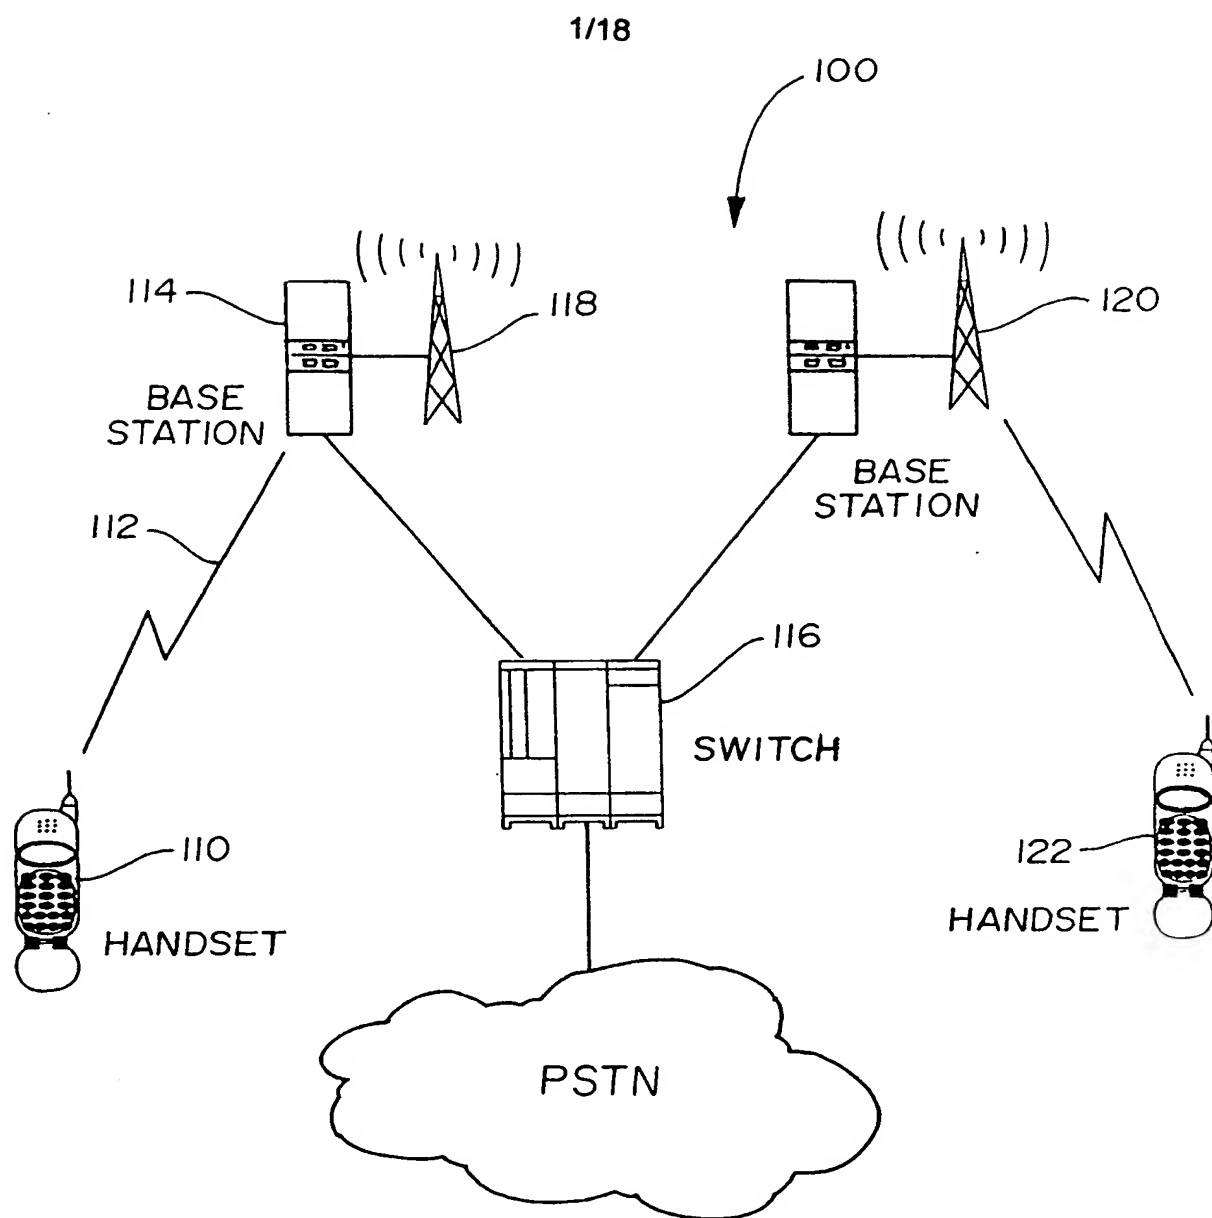


FIG. 1

2/18

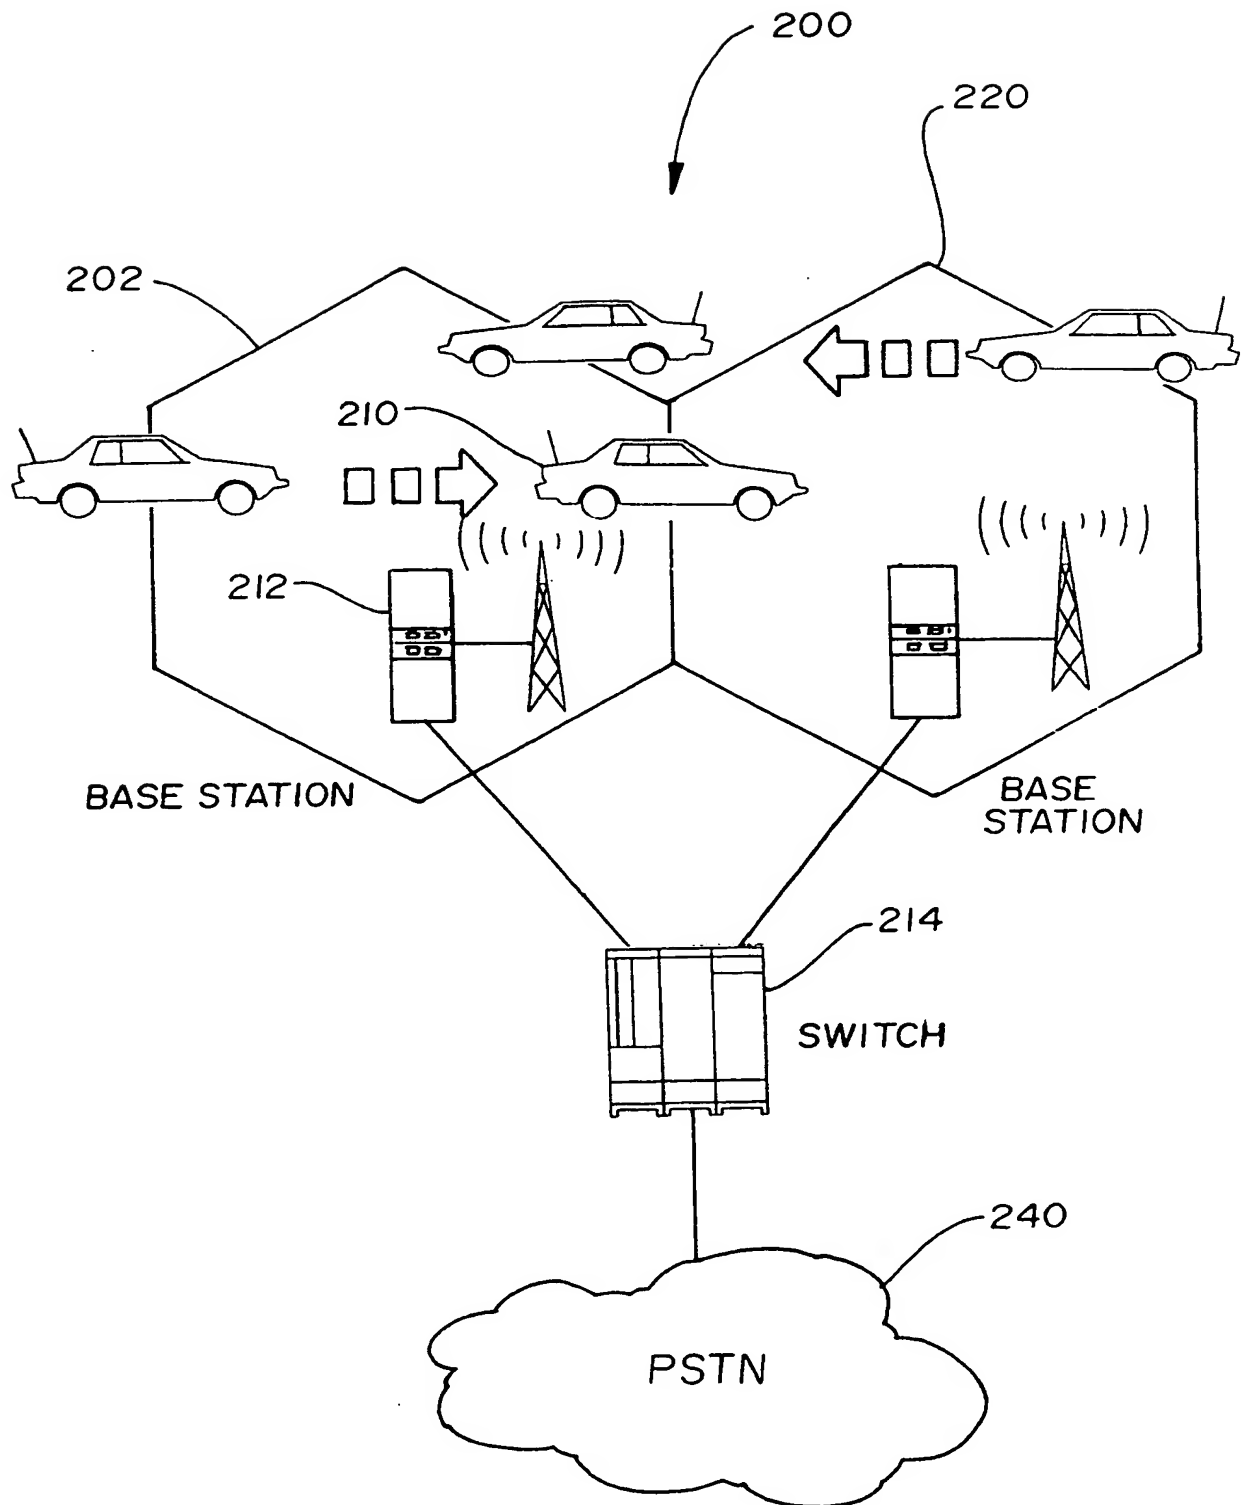
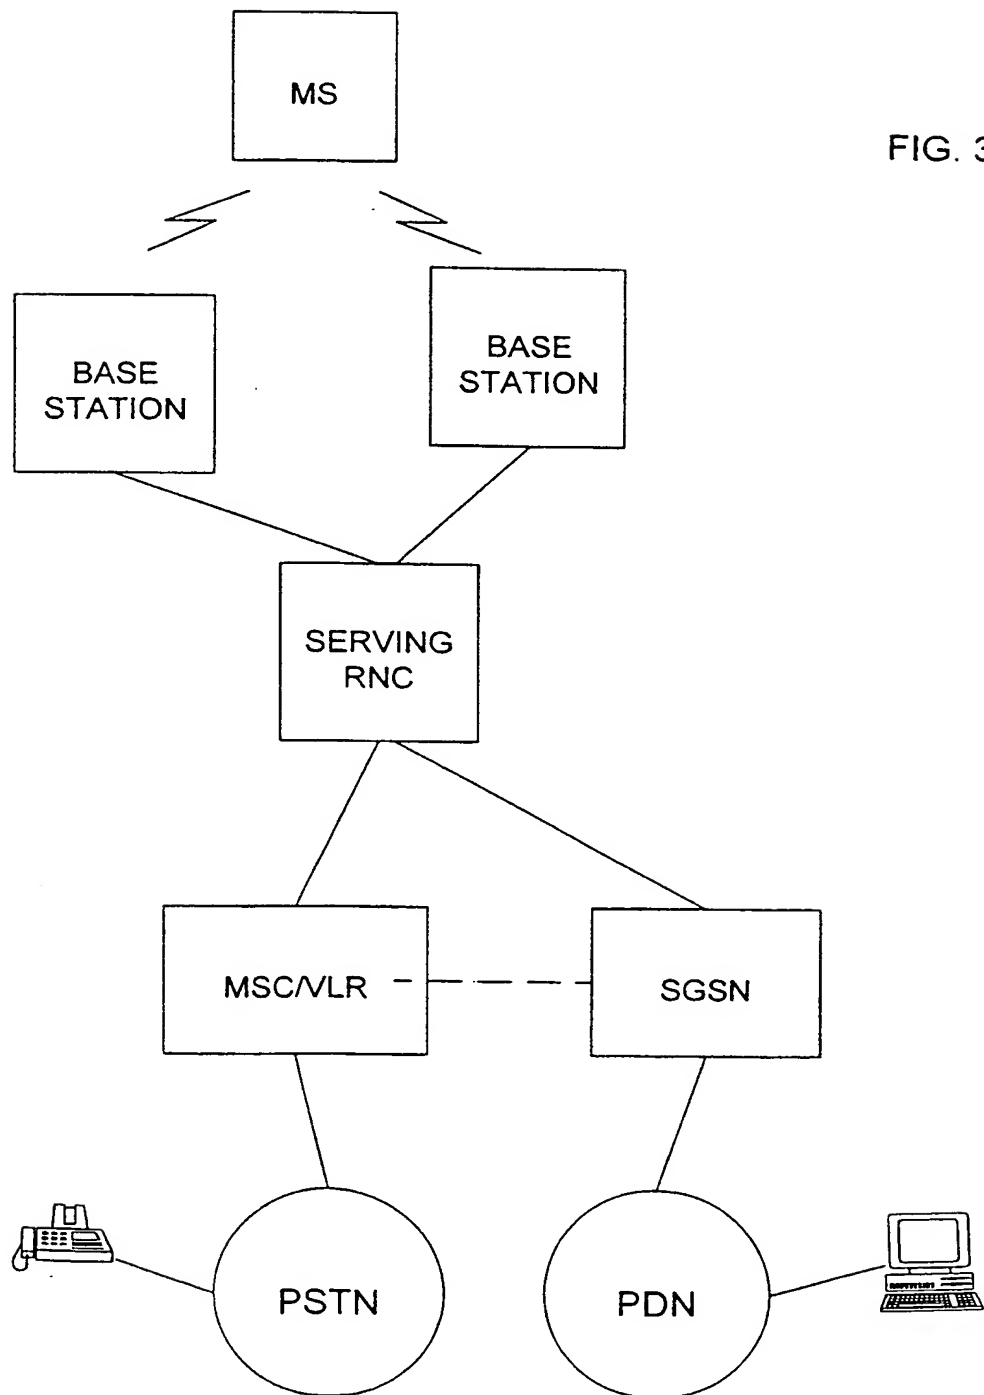


FIG. 2

3/18



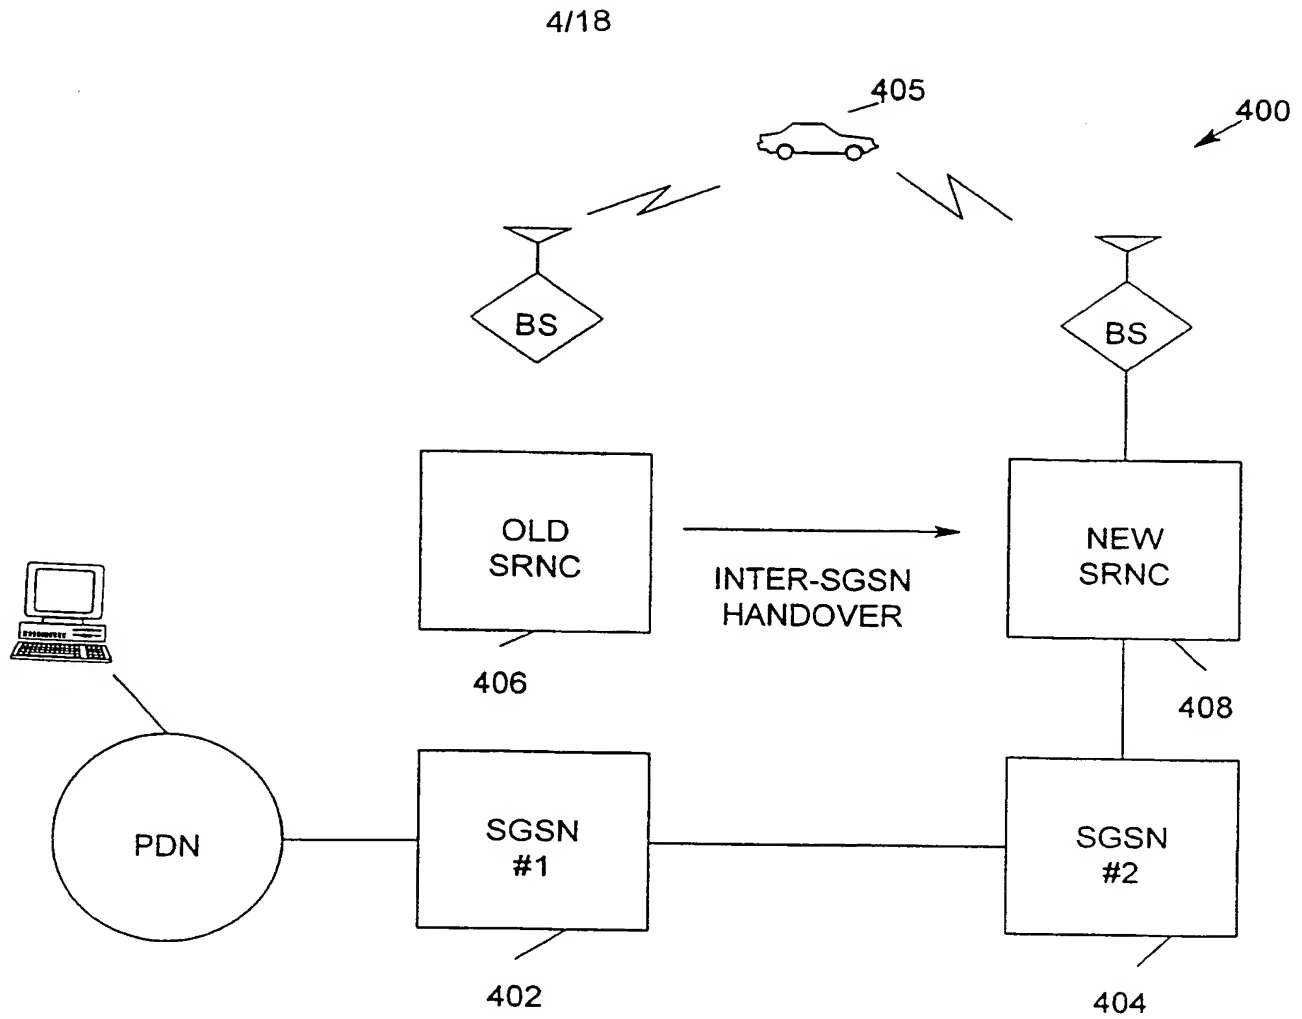


FIG. 4

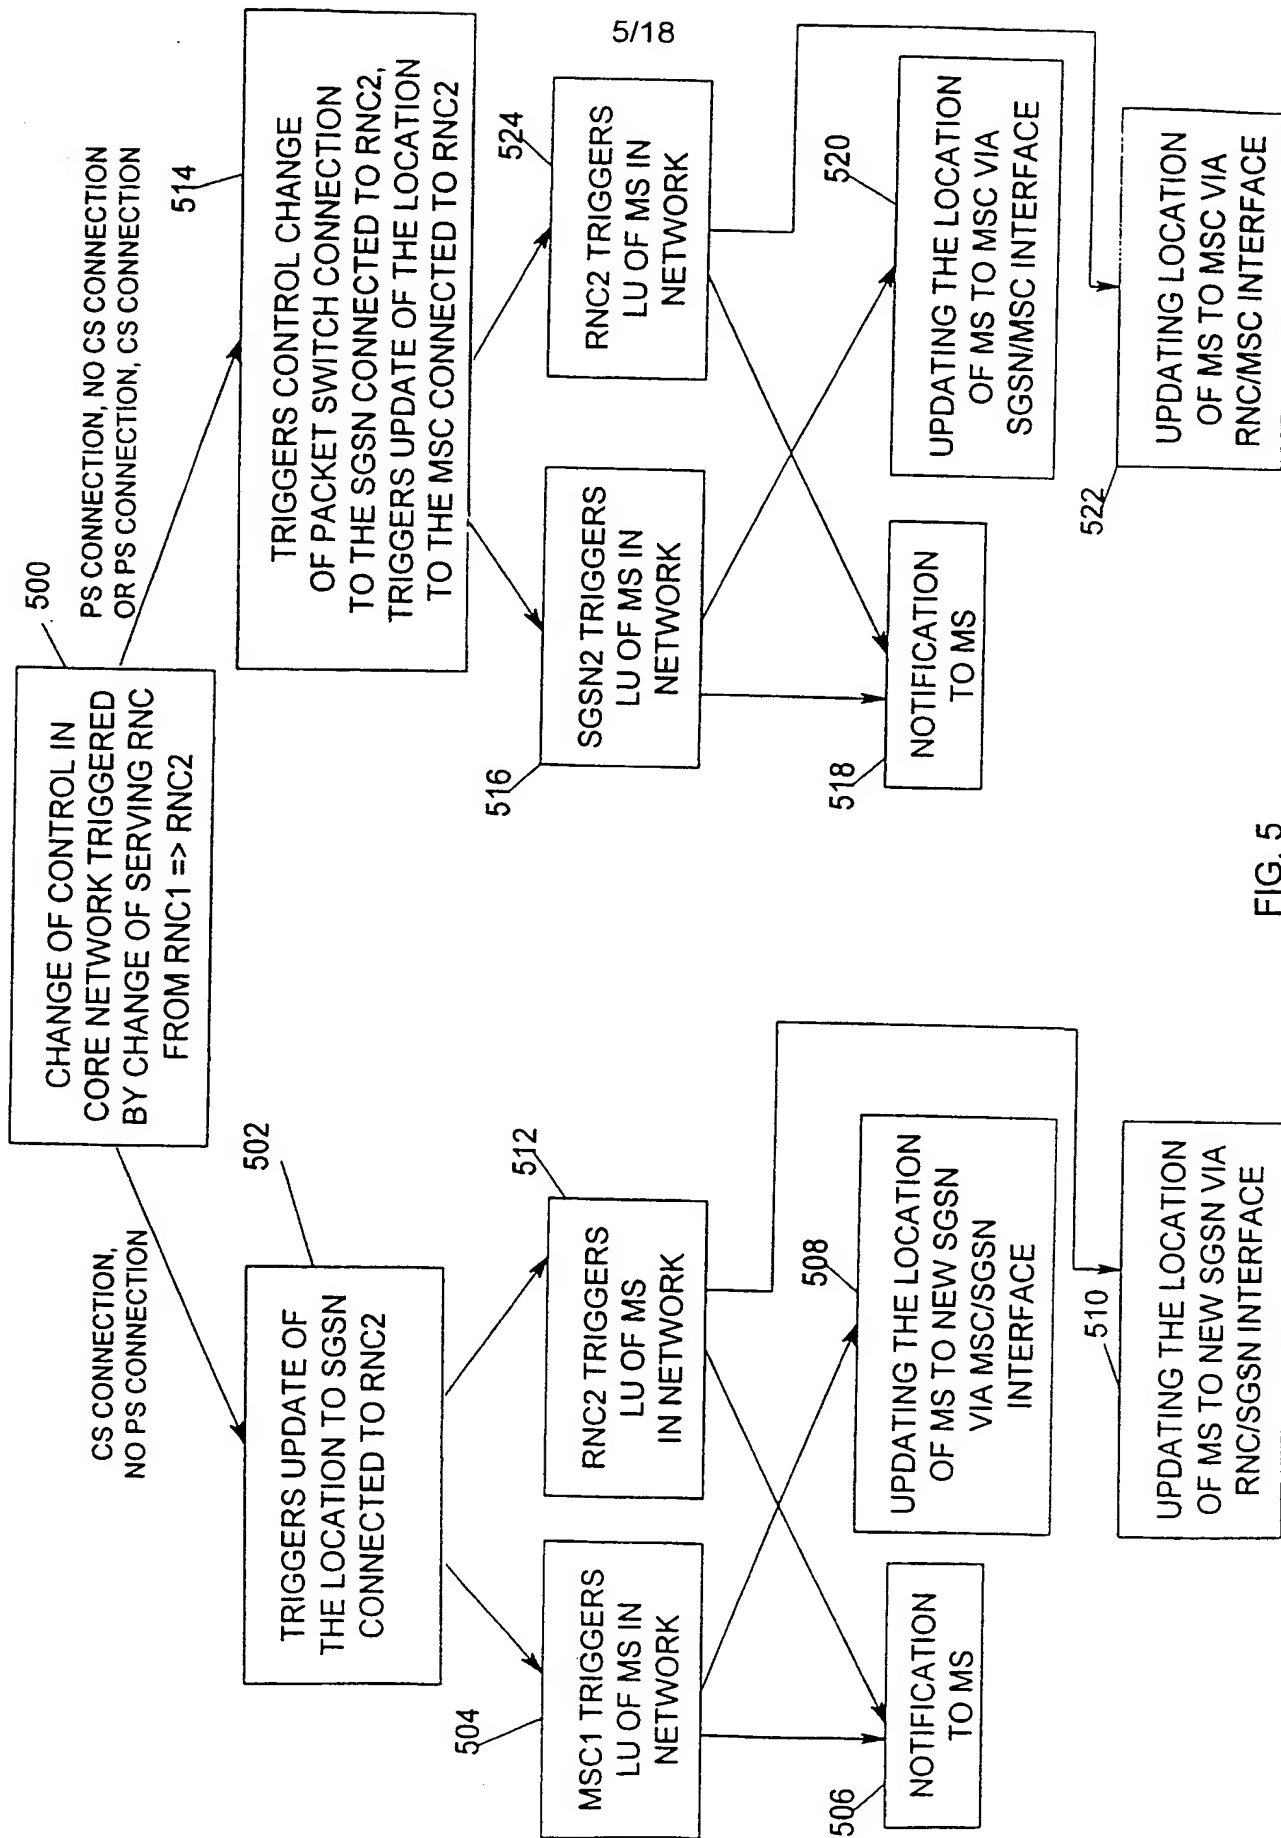


FIG. 5

6/18

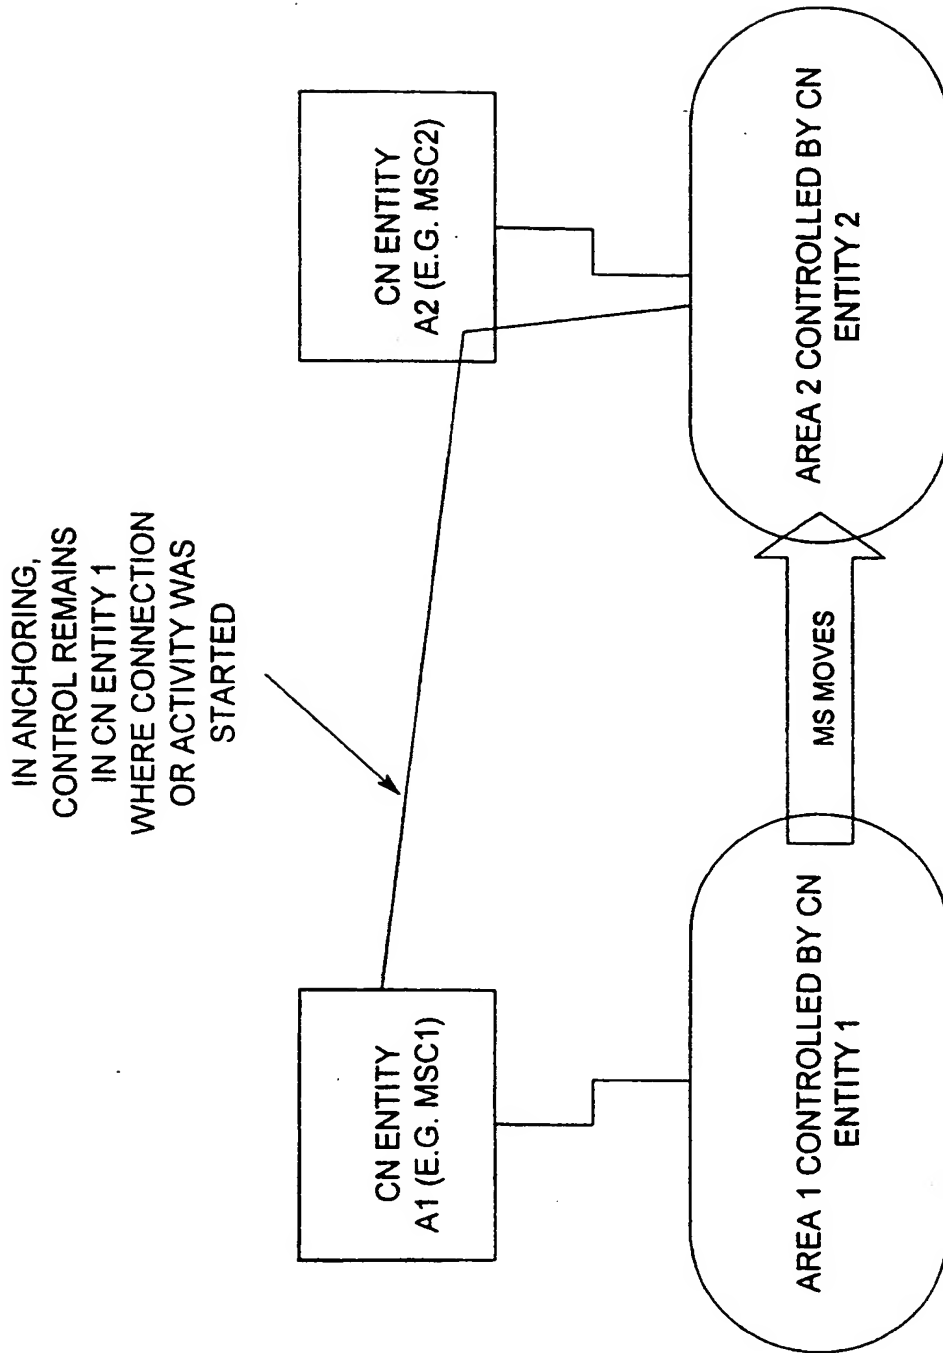


FIG. 6

7/18

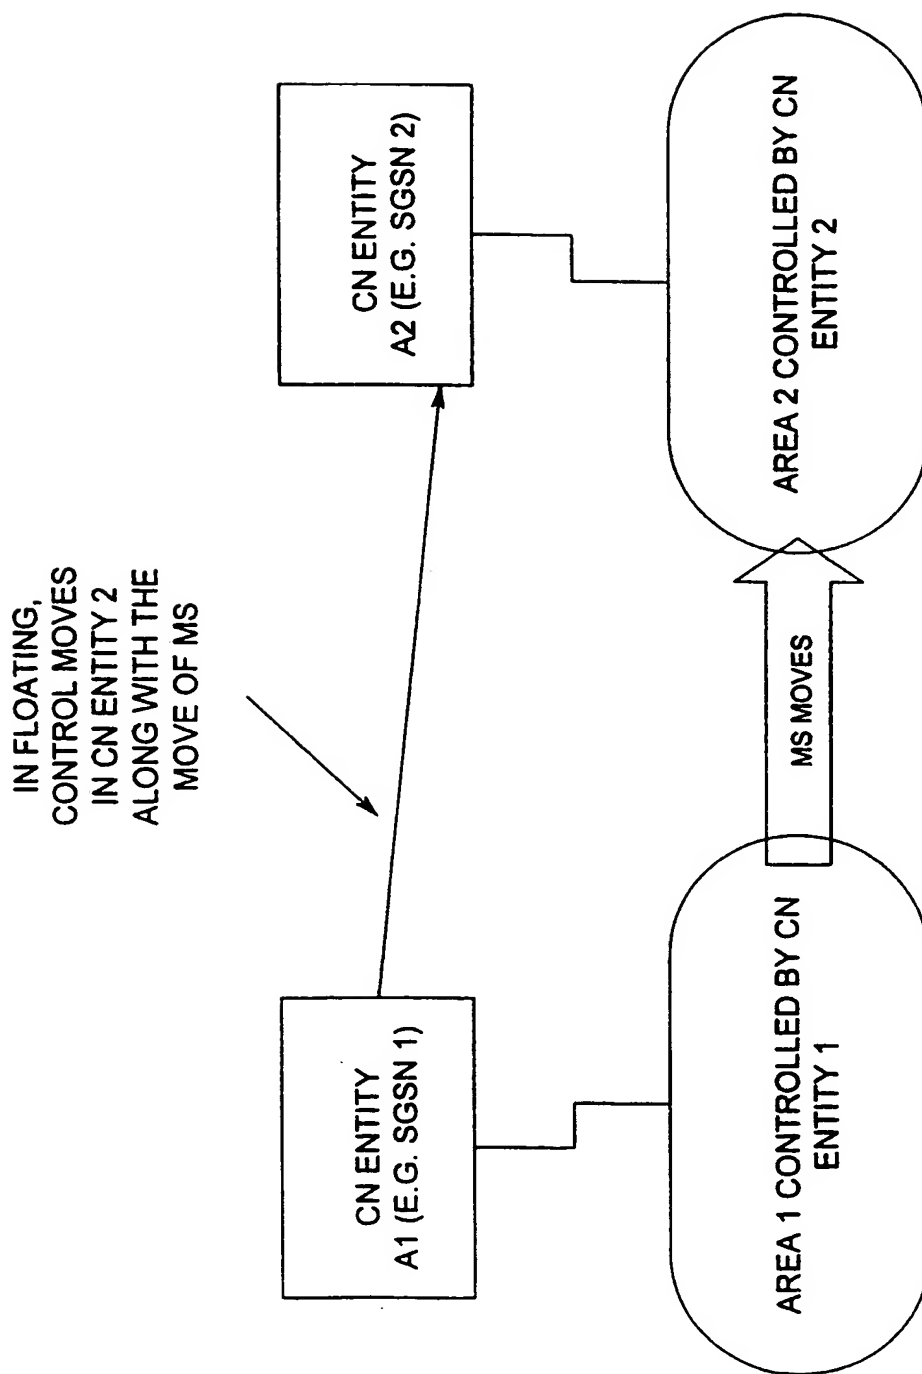


FIG. 7

8/18

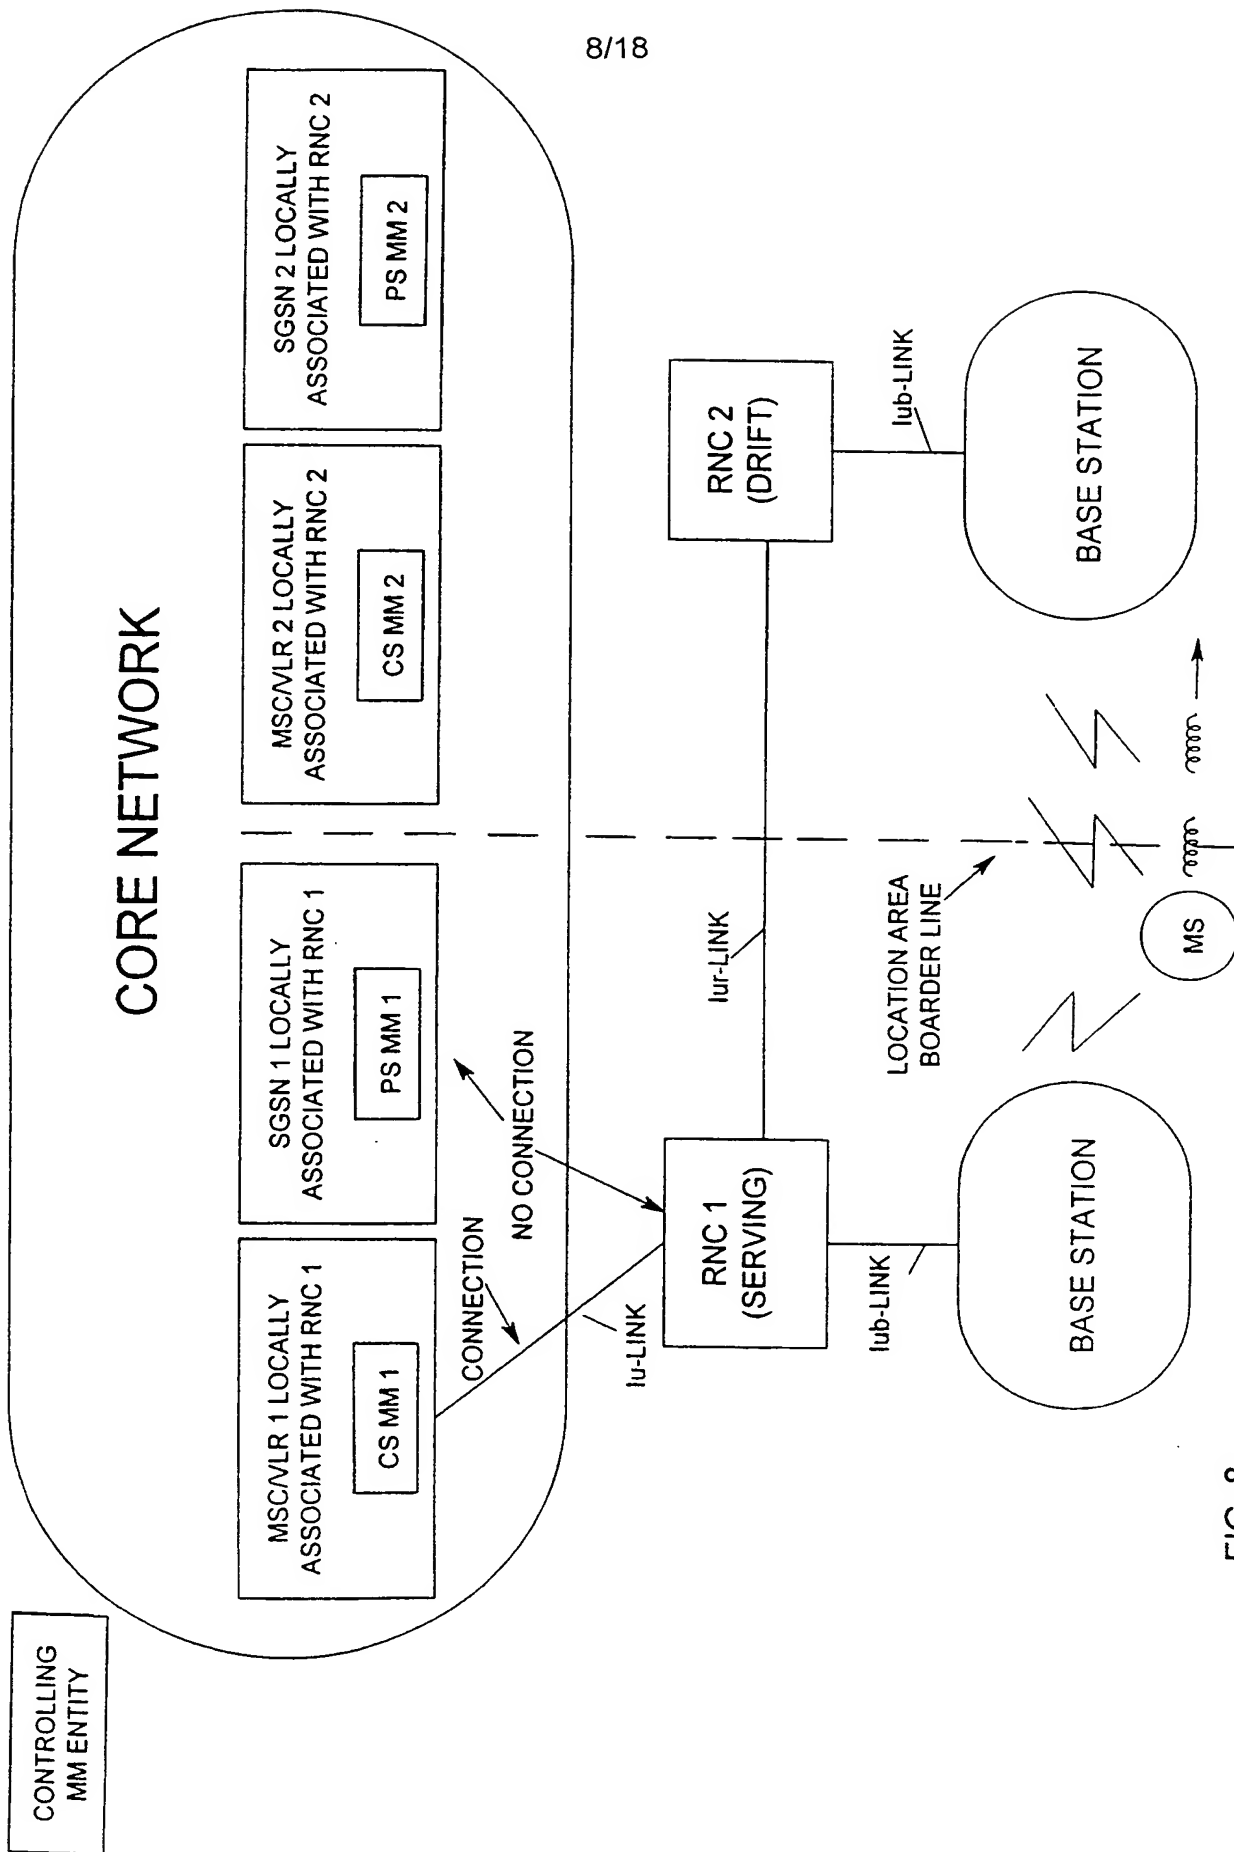


FIG. 8

CONTROLLING
MM ENTITY

9/18

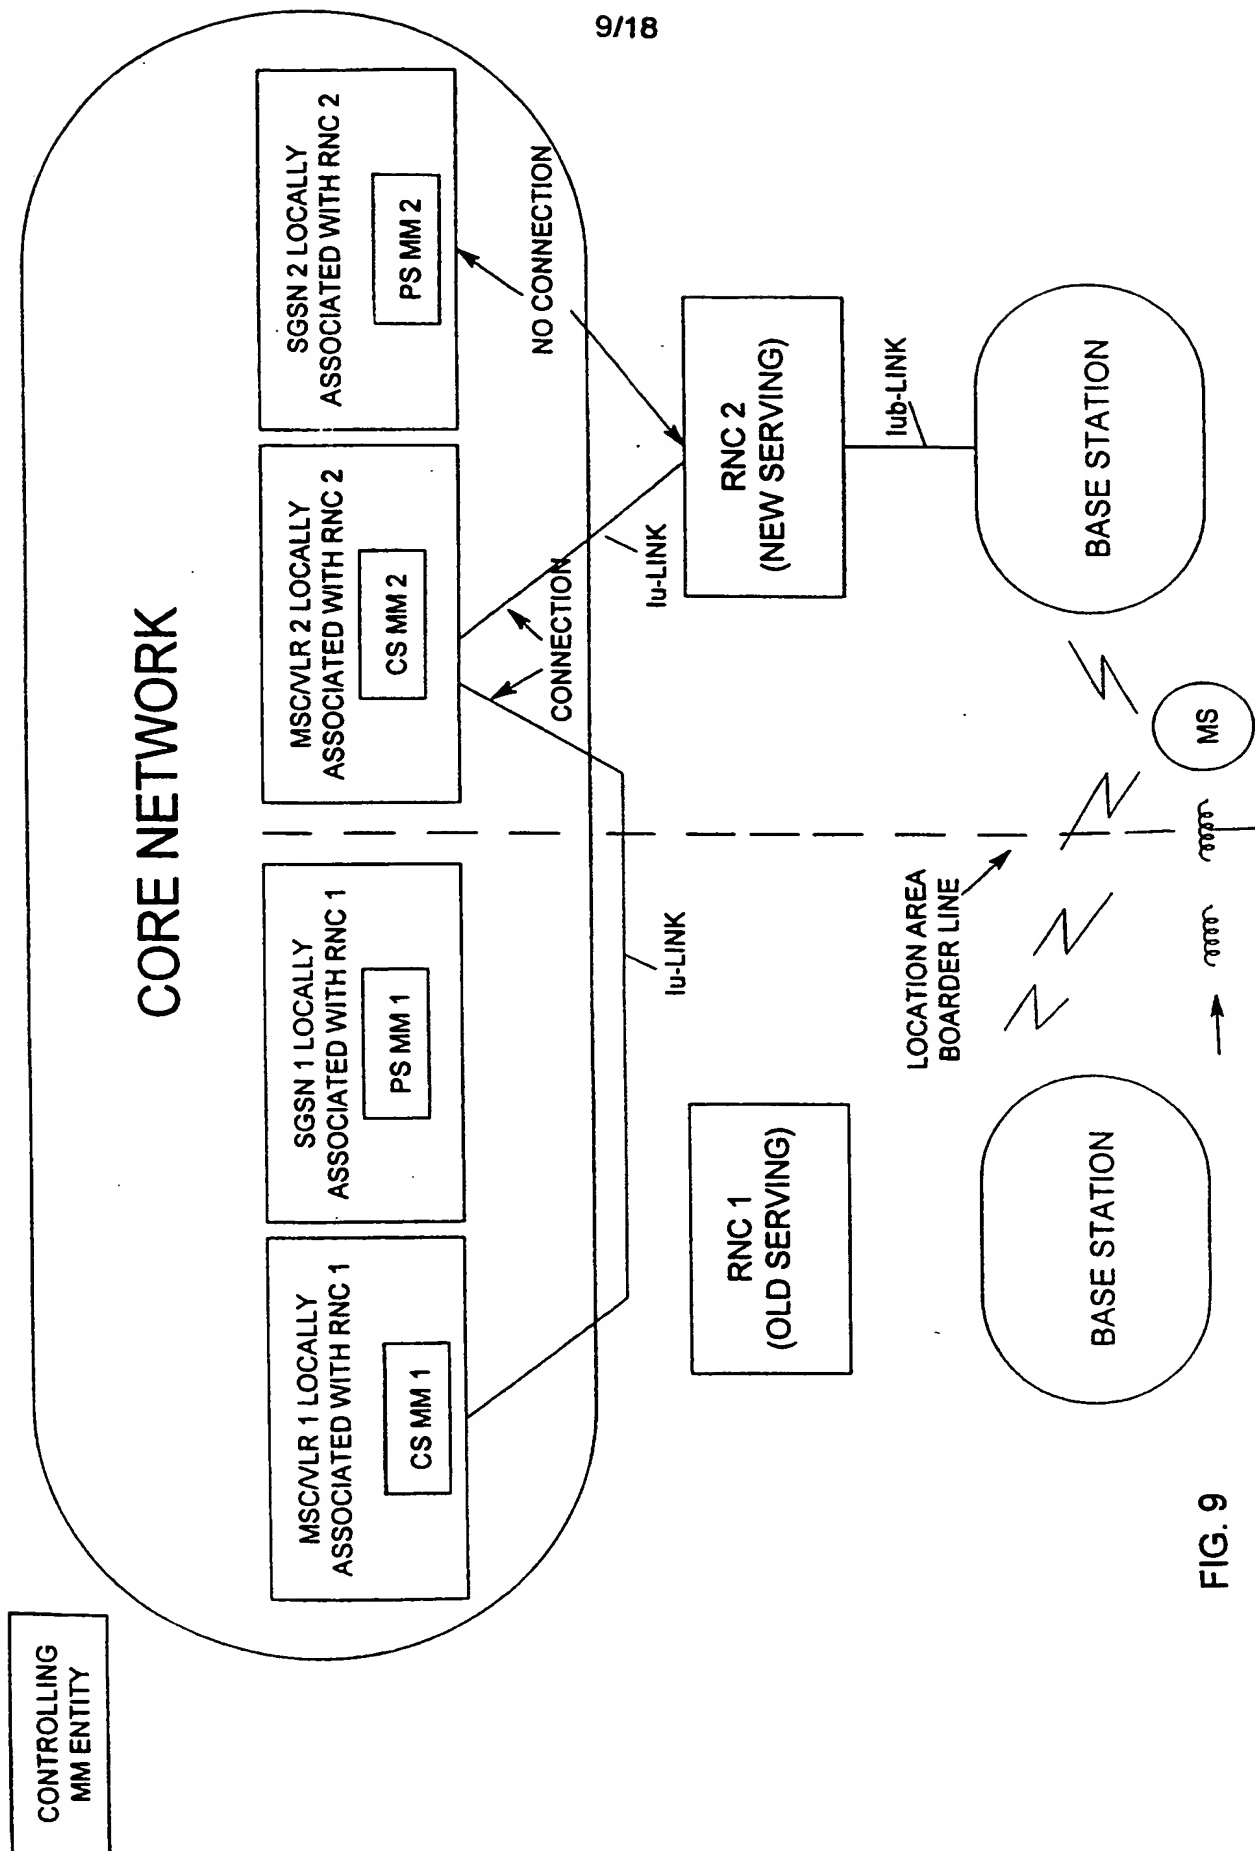


FIG. 9

10/18

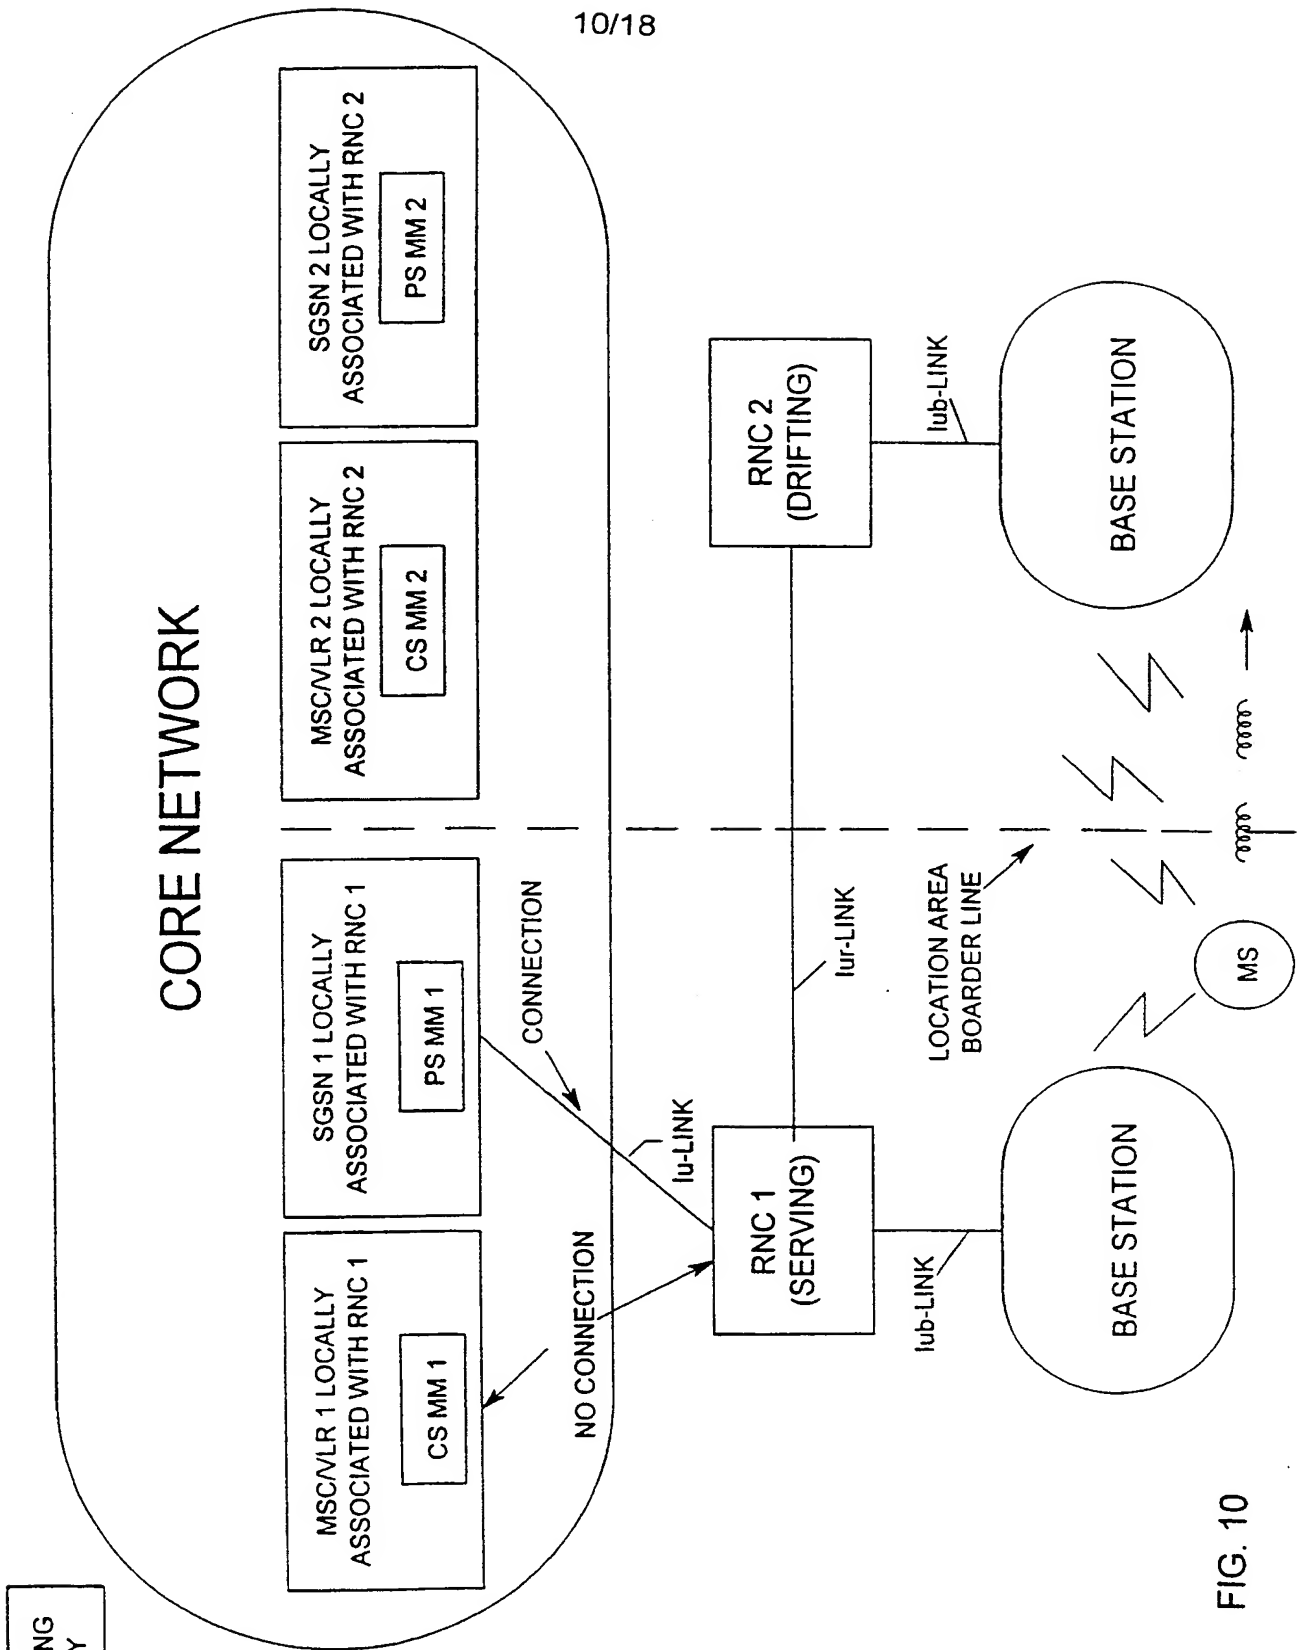


FIG. 10

CONTROLLING
MM ENTITY

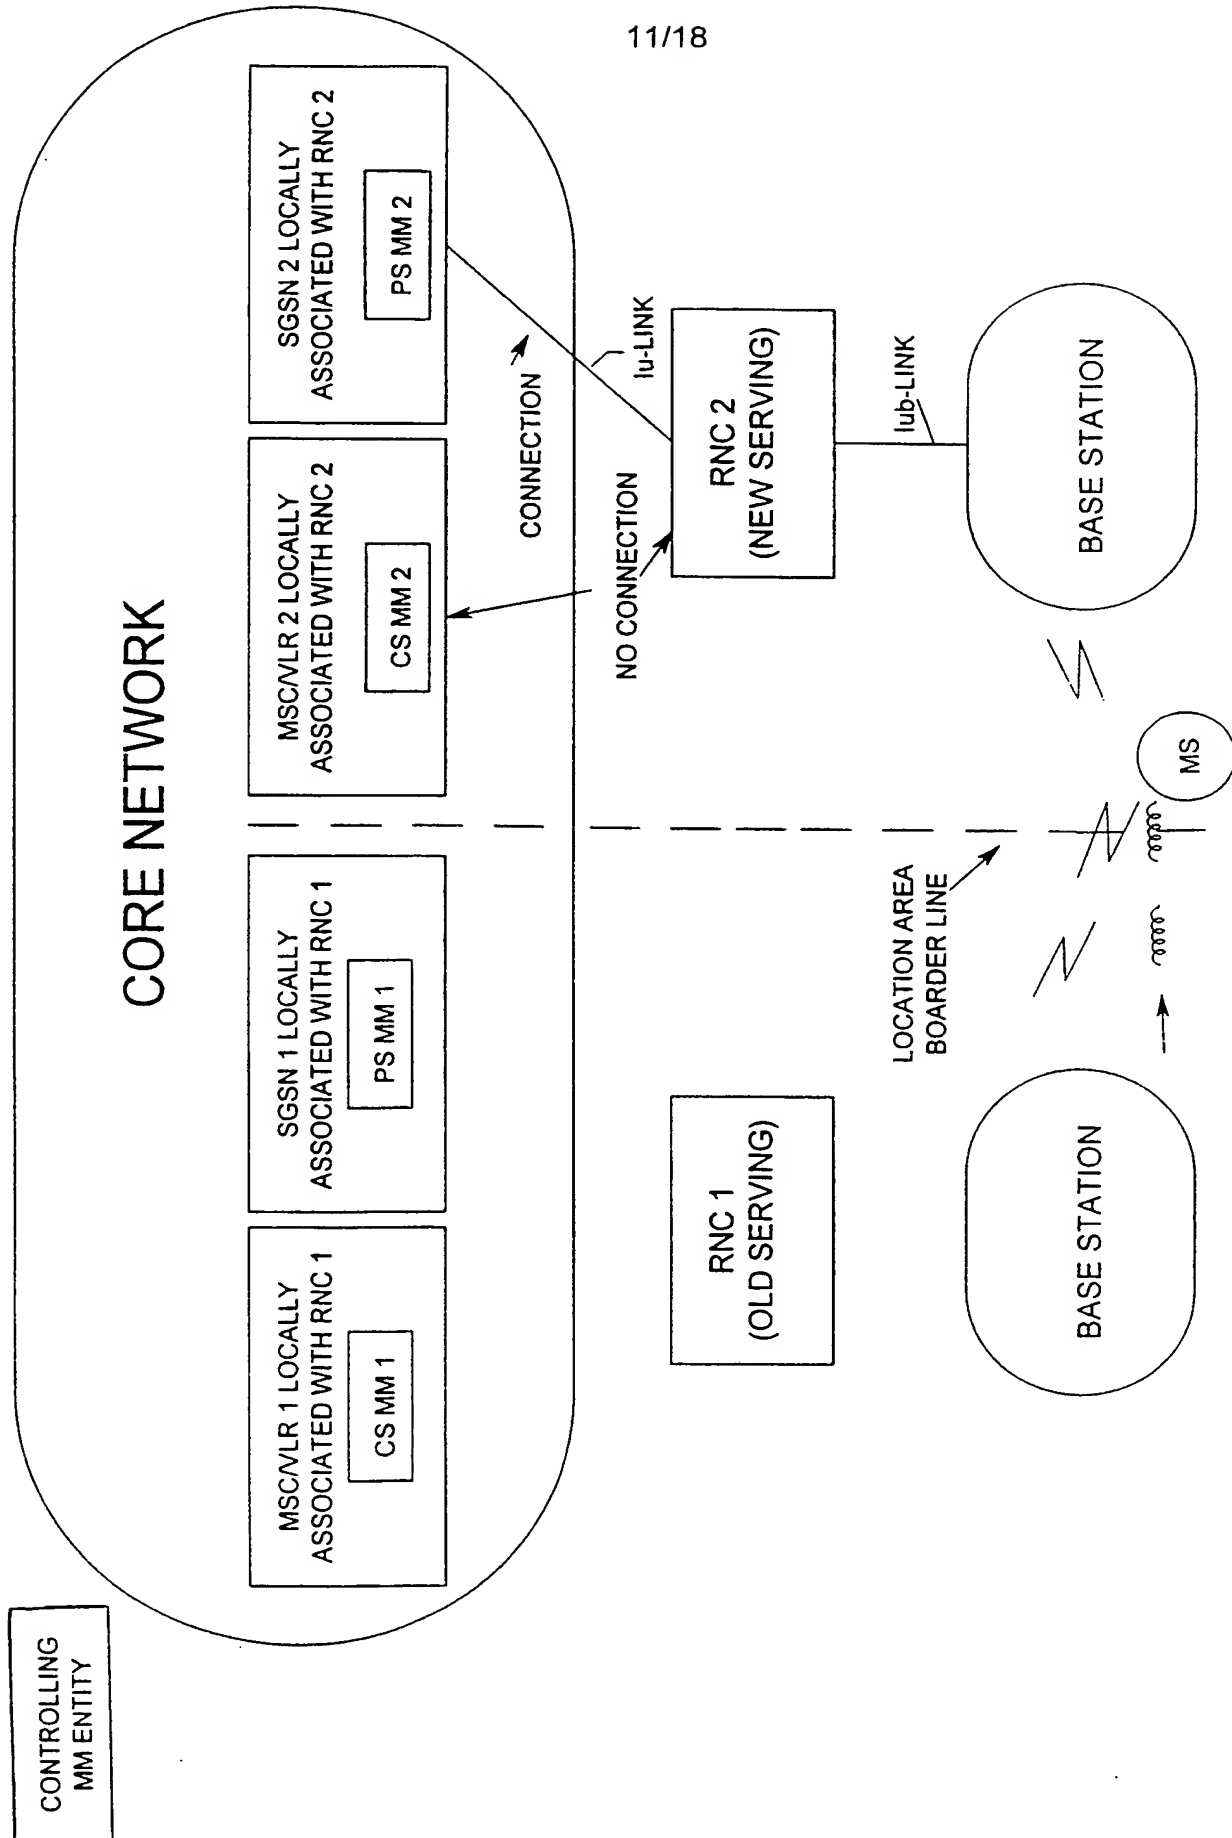


FIG. 11

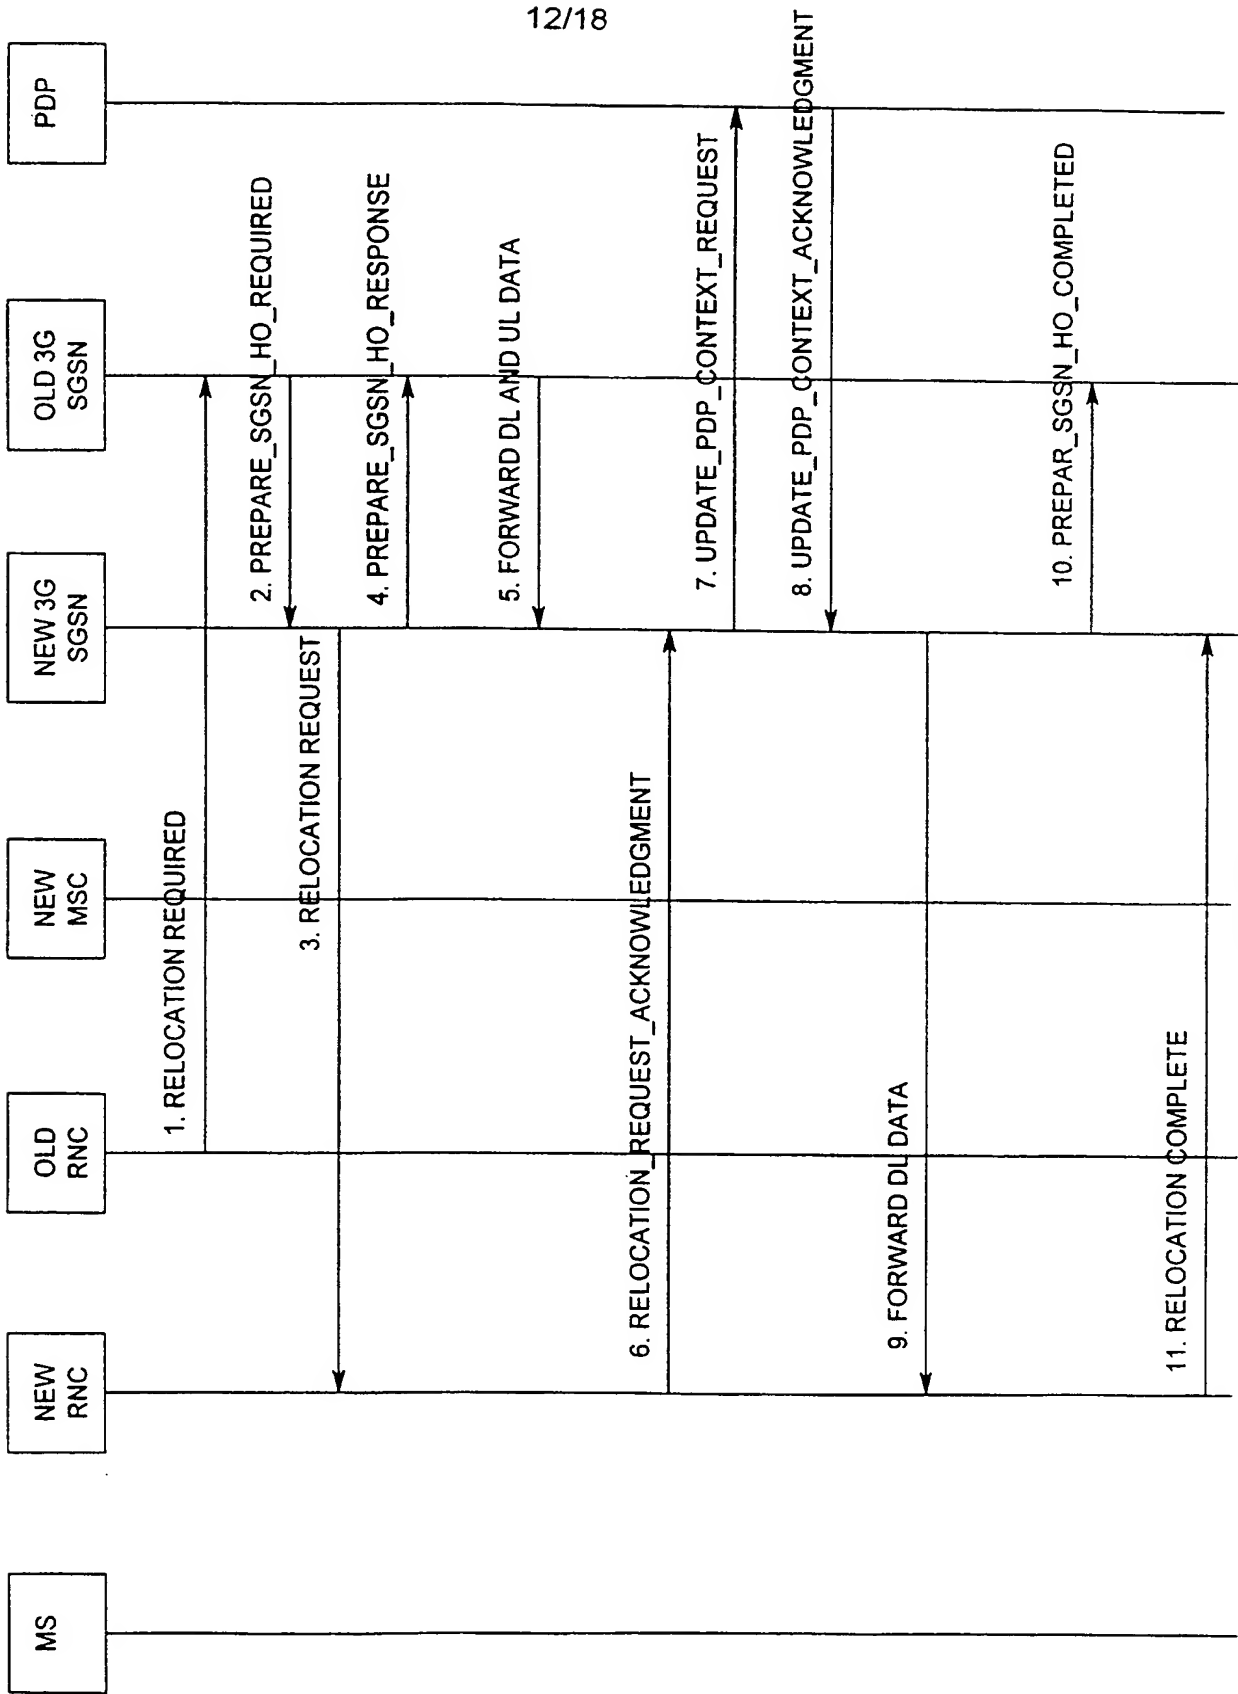


FIG. 12

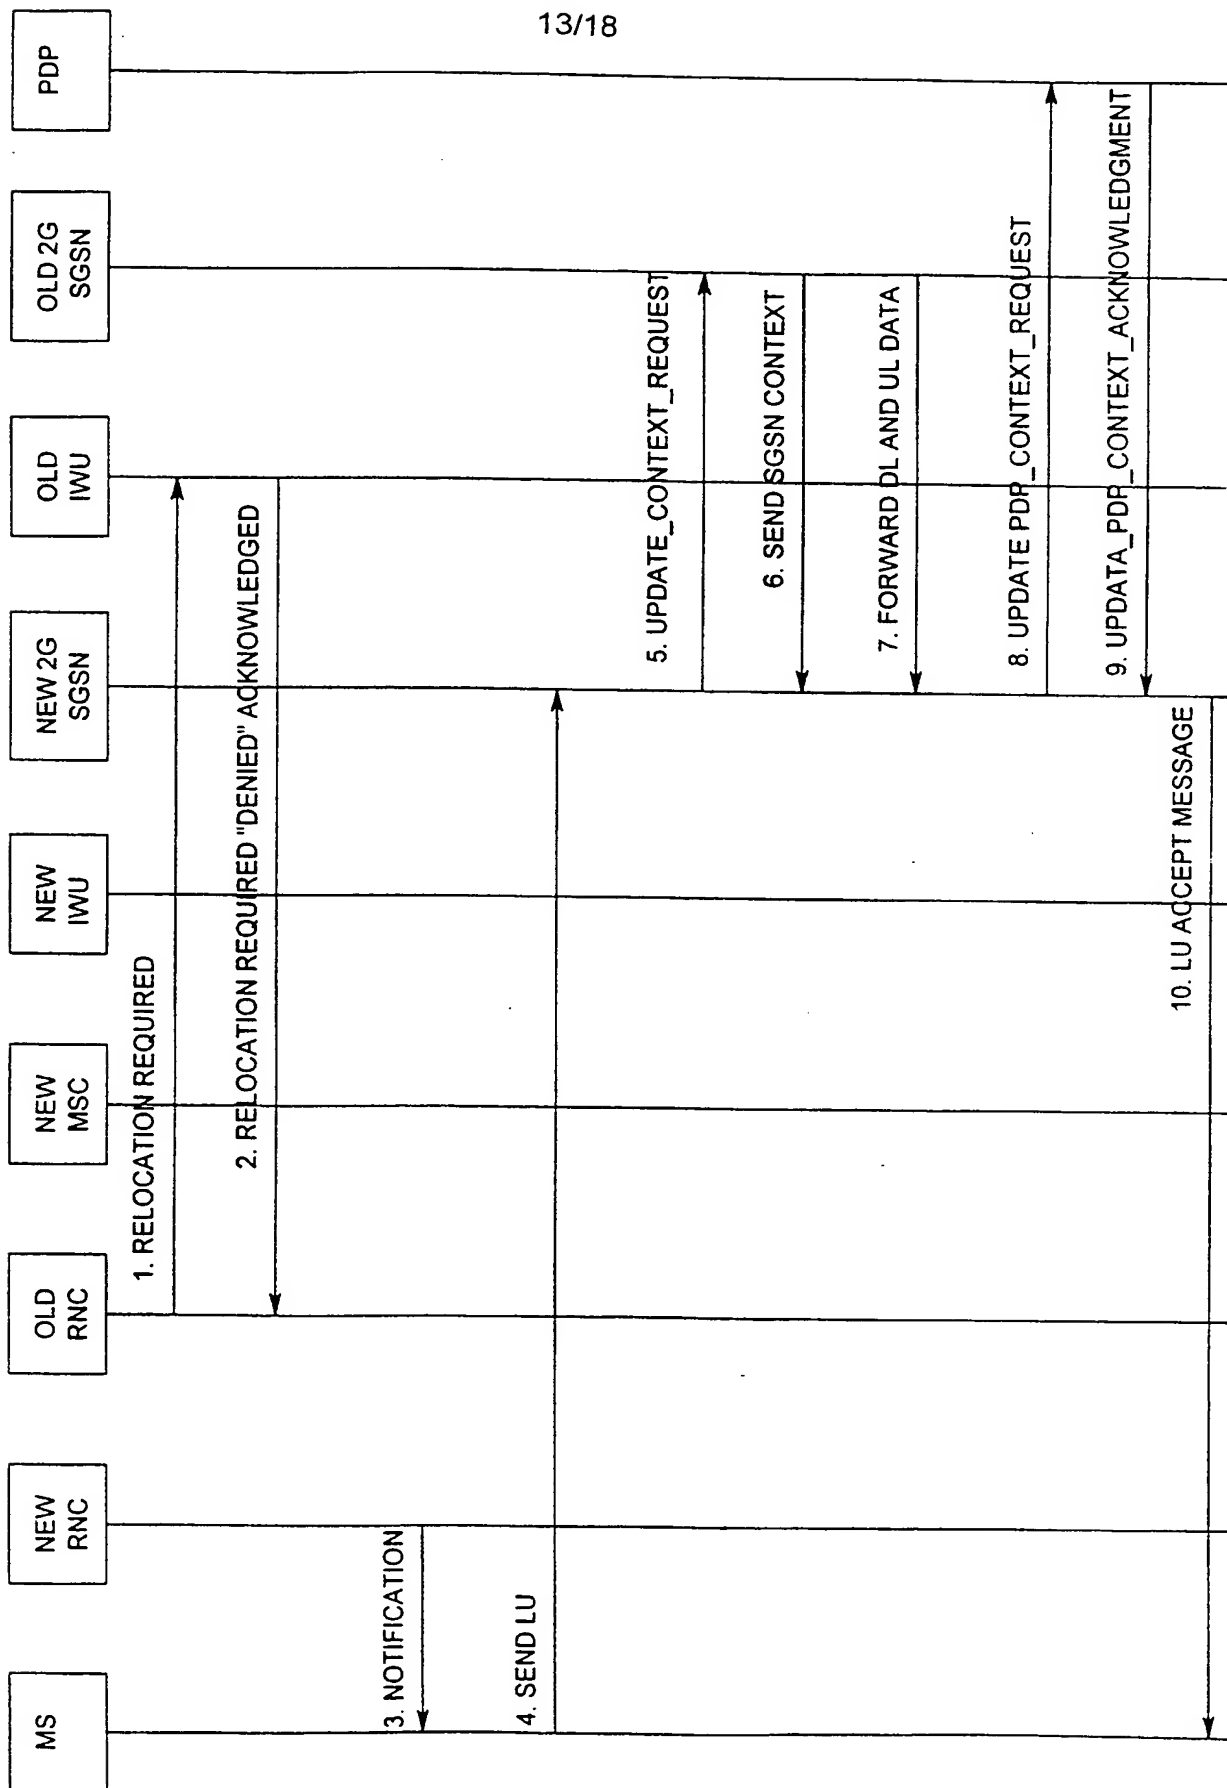


FIG. 13

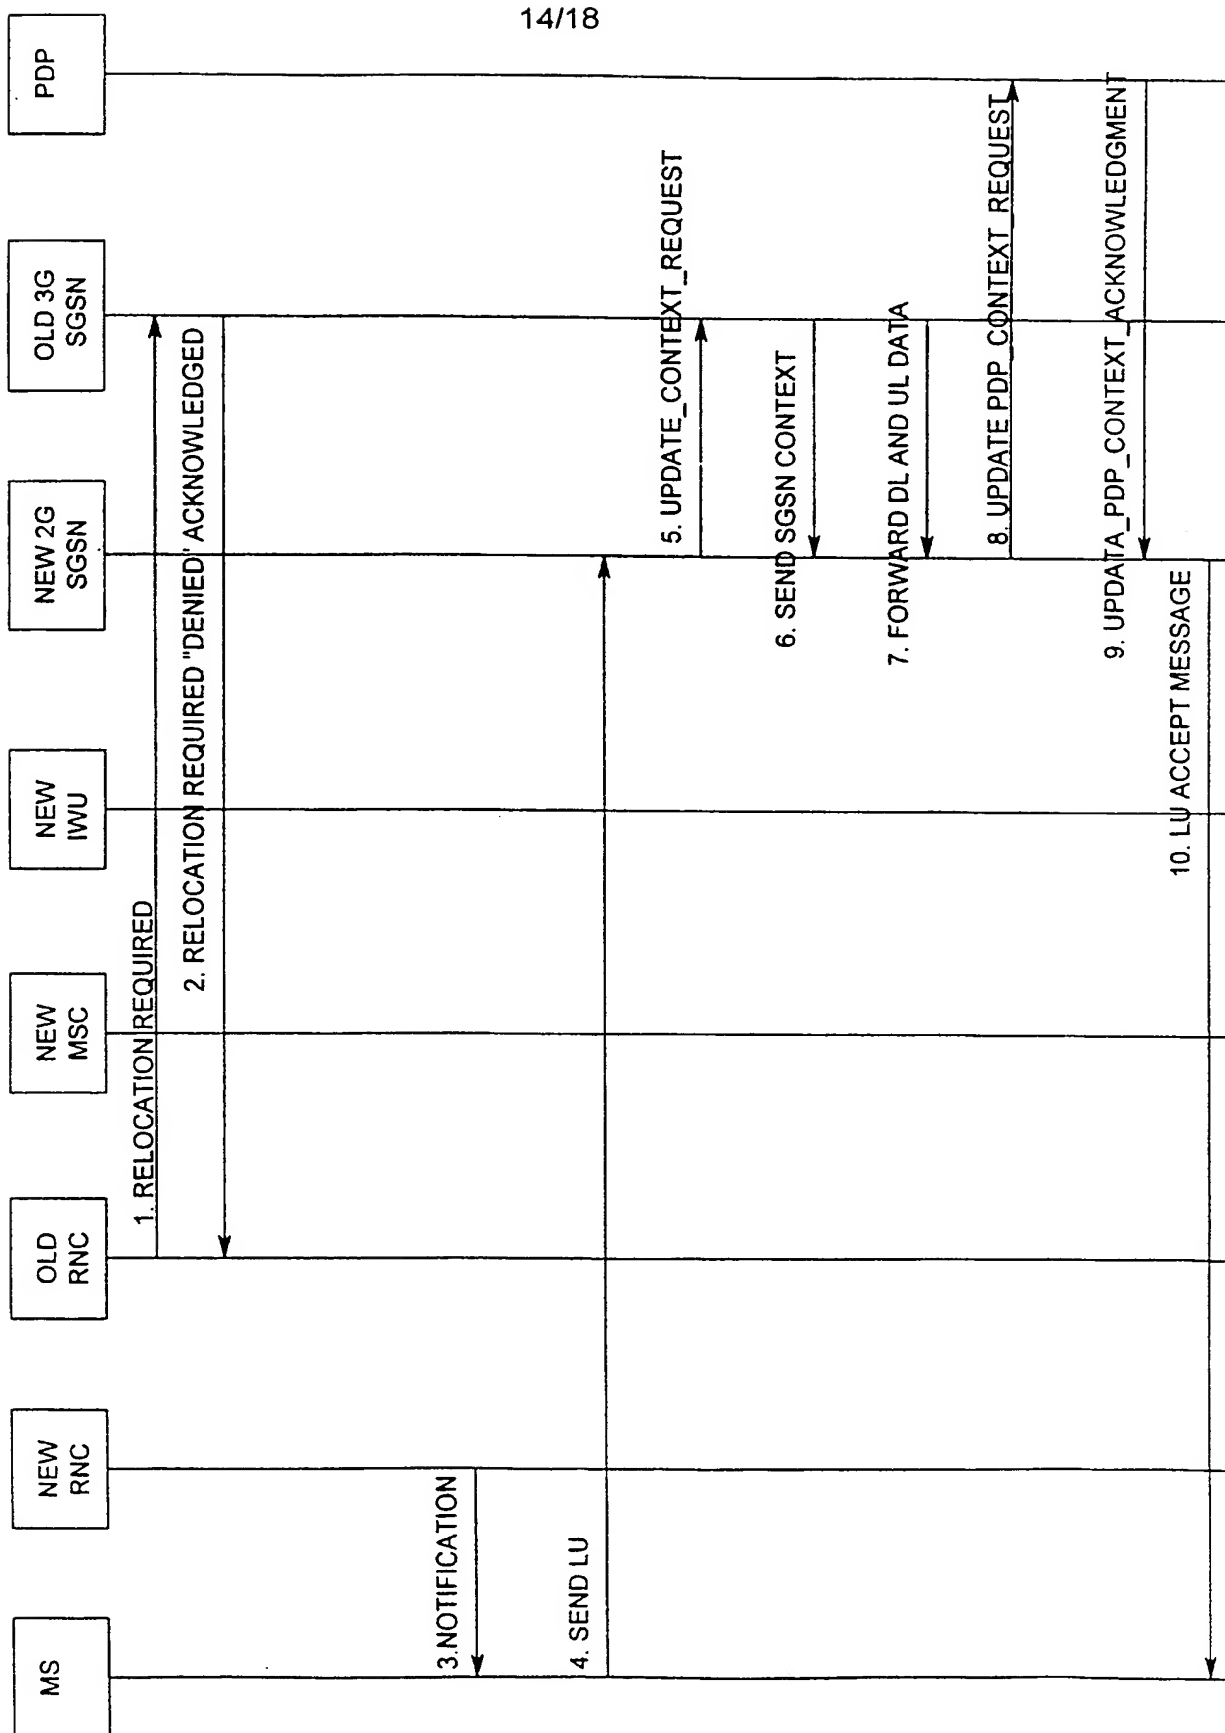


FIG. 14

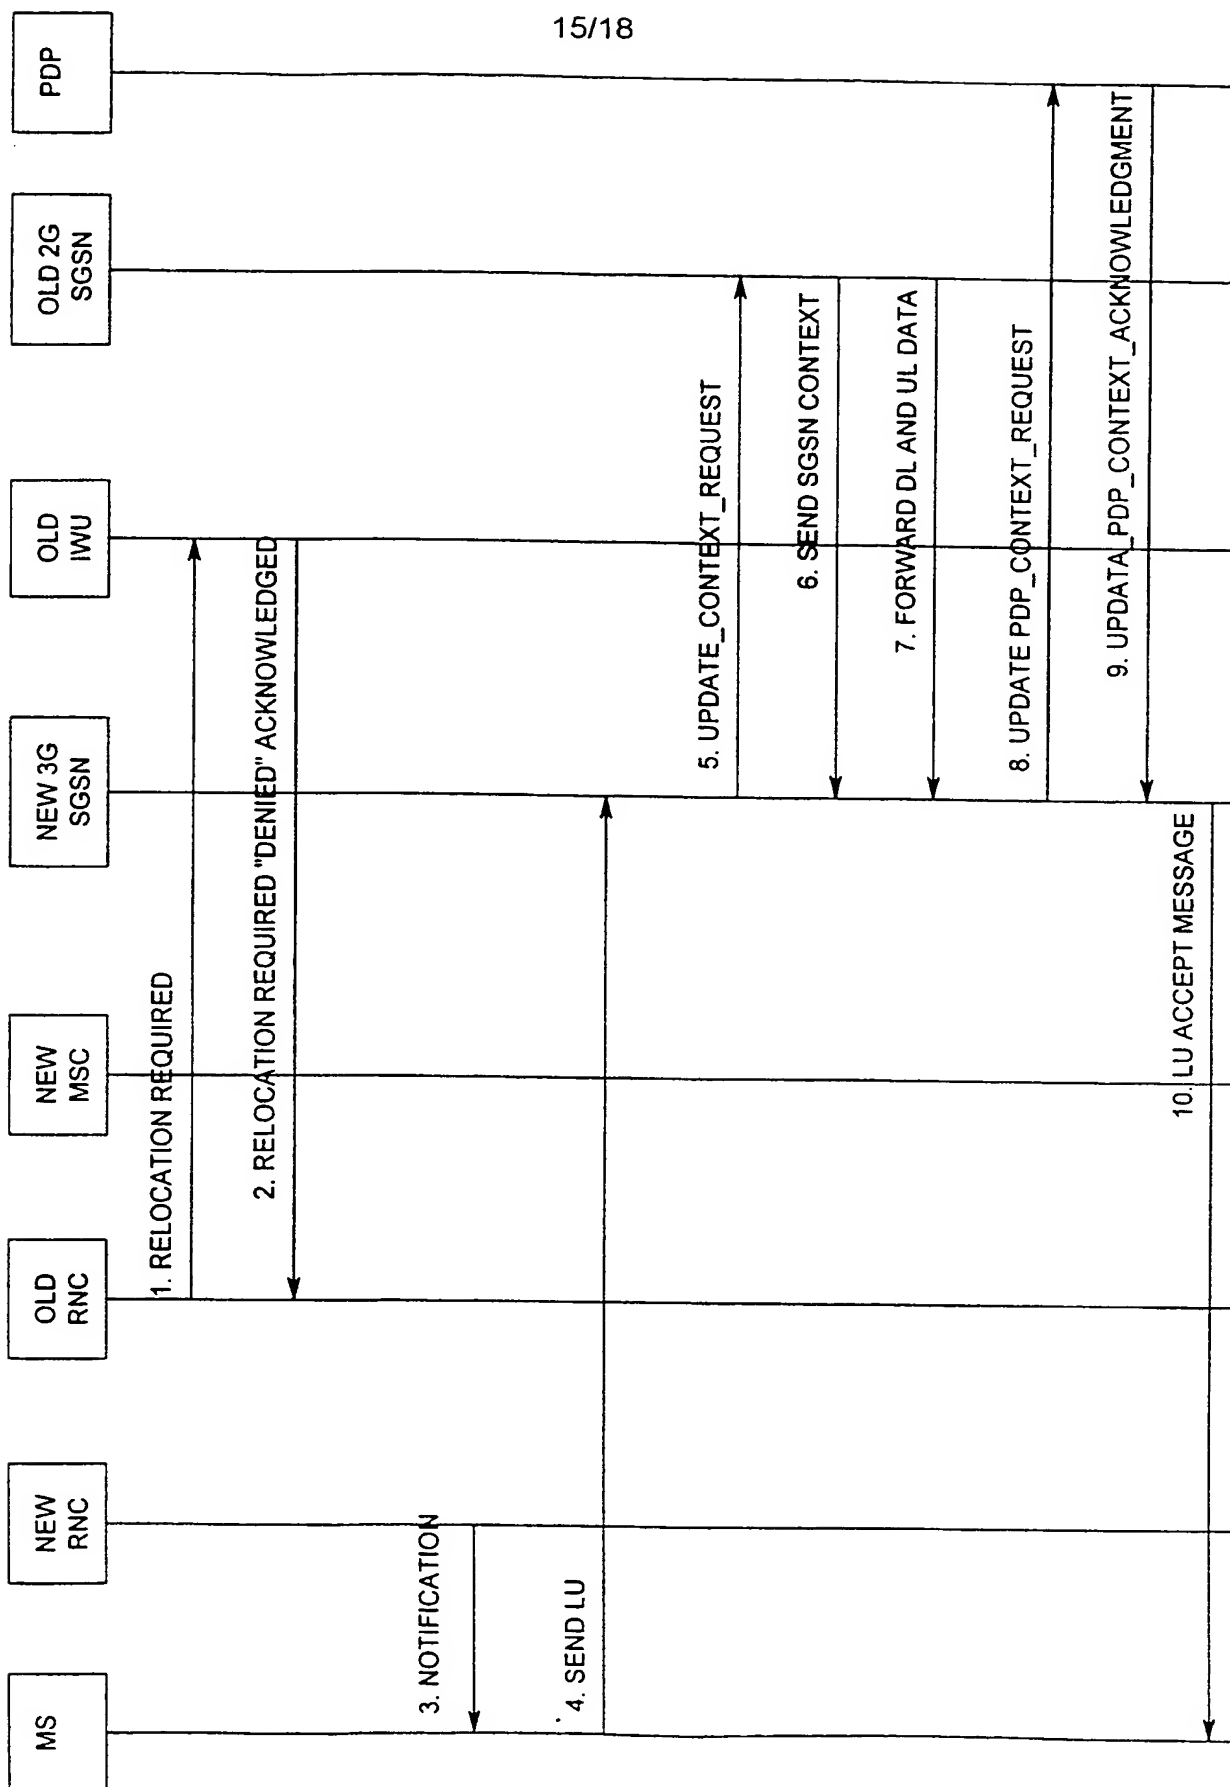


FIG. 15

16/18

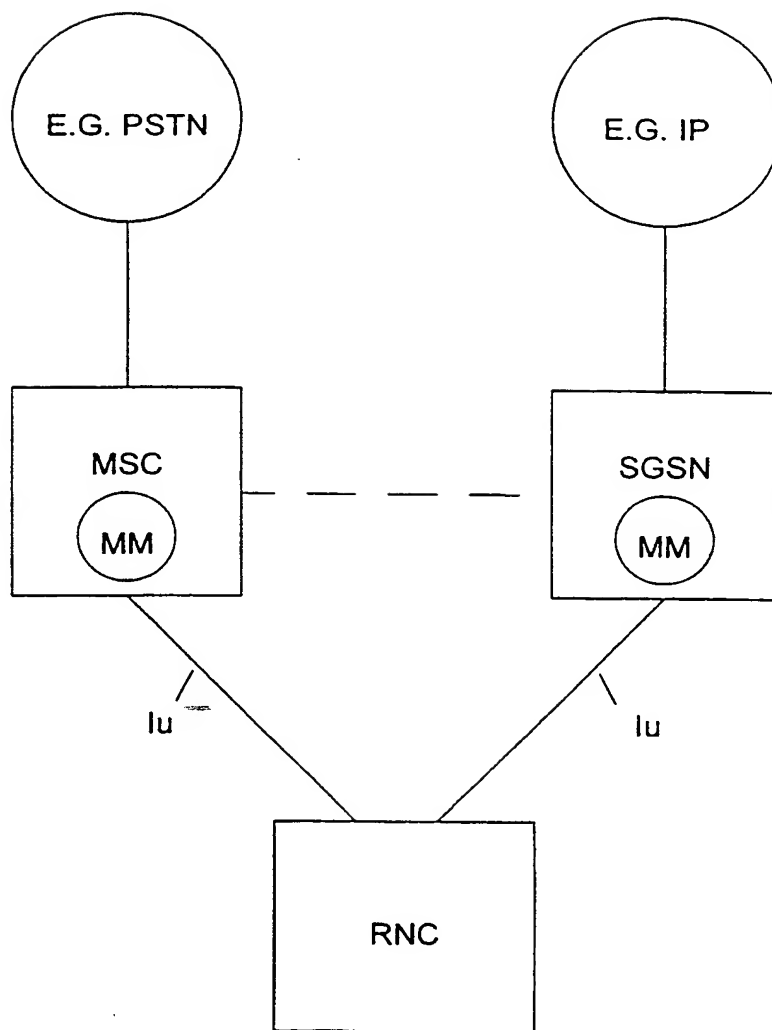


FIG. 16

17/18

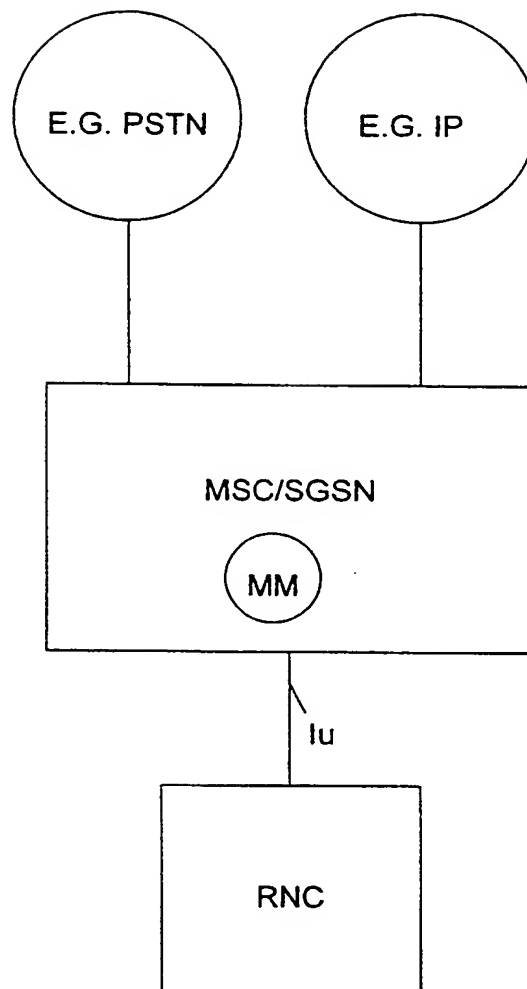


FIG. 17

18/18

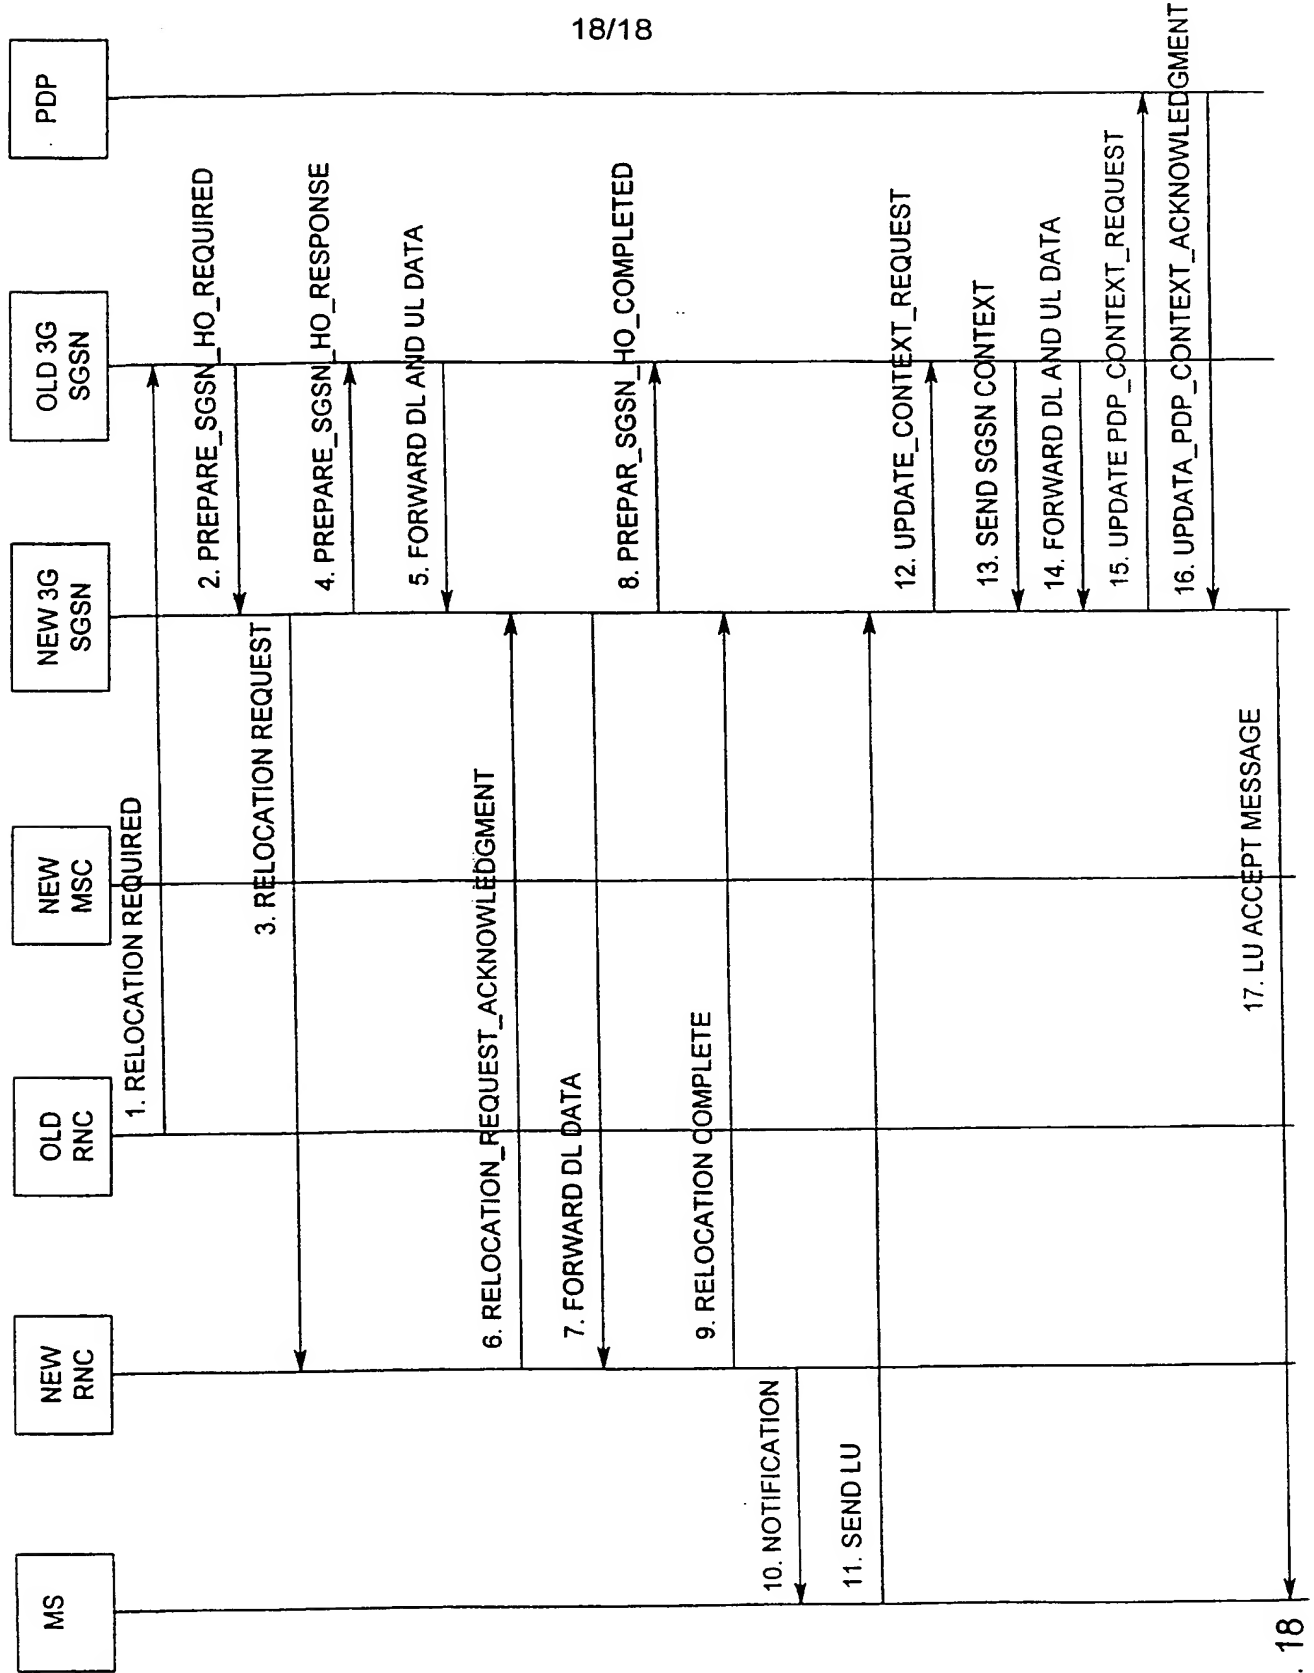


FIG. 18

THIS PAGE BLANK (USPTO)



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ :

H04Q 7/38

A3

(11) International Publication Number:

WO 99/66740

(43) International Publication Date: 23 December 1999 (23.12.99)

(21) International Application Number: PCT/US99/12897

(22) International Filing Date: 9 June 1999 (09.06.99)

(30) Priority Data:

| | | |
|------------|--------------------------|----|
| 09/098,216 | 16 June 1998 (16.06.98) | US |
| 09/271,191 | 17 March 1999 (17.03.99) | US |

(71)(72) Applicants and Inventors: EINOLA, Heikki [FI/FI]; Hi-
ihtäjätie 8 A 15, FIN-00810 Helsinki (FI). RAJANIEMI,
Jaakko [FI/FI]; Karstulantie 8 B 31, FIN-00550 Helsinki
(FI). LE, Khiem [US/US]; 607 St. Andrews Place, Coppell,
TX 75019 (US).

(74) Agent: BRUESS, Steven, C.; Merchant & Gould P.C., 3100
Norwest Center, 90 South Seventh Street, Minneapolis, MN
55402-4131 (US).


(81) Designated States: AE, AL, AM, AT, AT (Utility model), AU,
AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ
(Utility model), DE, DE (Utility model), DK, DK (Utility
model), EE, EE (Utility model), ES, FI, FI (Utility model),
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG,
MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE,
SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA,
UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE,
LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ,
BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE,
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,
NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,
GN, GW, ML, MR, NE, SN, TD, TG).

Published*With international search report.**Before the expiration of the time limit for amending the claims
and to be republished in the event of the receipt of amendments.*

(88) Date of publication of the international search report:

23 March 2000 (23.03.00)

(54) Title: LOCATION UPDATE METHOD AND INTER CORE NETWORK ENTITY HANDOVER METHOD

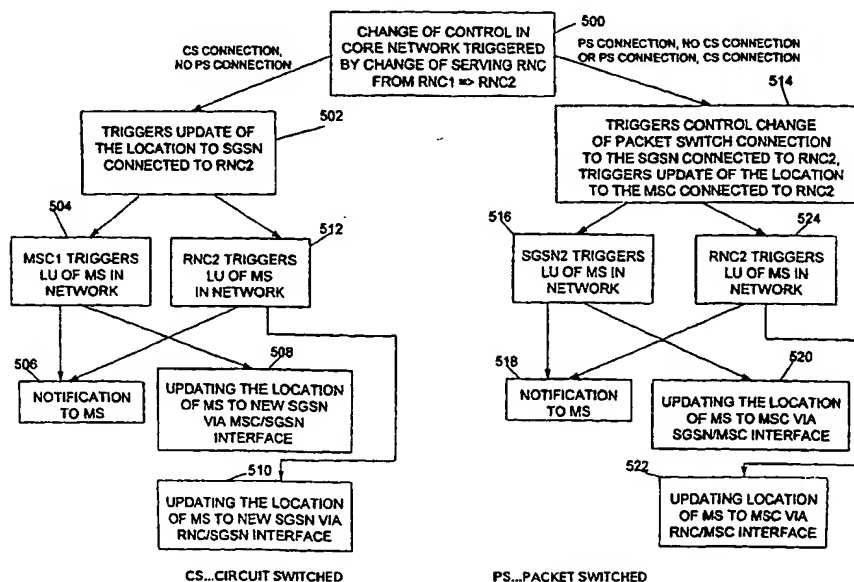

(57) Abstract

A scheme for providing a notification to a Mobile Station (MS) to initiate a location update in a mobile telecommunication system, a scheme for providing update of location of the MS to a new Core Network (CN) entity via interface between the CN entities, a scheme for providing update of location of the MS to a new CN entity via interface between a CN entity and a Serving RNC (SRNC), a scheme for providing an inter Core Network (CN) handover, e.g. inter-SGSN handover, in a mobile telecommunication system, are disclosed.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

| | | | | | | | |
|----|--------------------------|----|---------------------|----|-----------------------|----|--------------------------|
| AL | Albania | ES | Spain | LS | Lesotho | SI | Slovenia |
| AM | Armenia | FI | Finland | LT | Lithuania | SK | Slovakia |
| AT | Austria | FR | France | LU | Luxembourg | SN | Senegal |
| AU | Australia | GA | Gabon | LV | Latvia | SZ | Swaziland |
| AZ | Azerbaijan | GB | United Kingdom | MC | Monaco | TD | Chad |
| BA | Bosnia and Herzegovina | GE | Georgia | MD | Republic of Moldova | TG | Togo |
| BB | Barbados | GH | Ghana | MG | Madagascar | TJ | Tajikistan |
| BE | Belgium | GN | Guinea | MK | The former Yugoslav | TM | Turkmenistan |
| BF | Burkina Faso | GR | Greece | | Republic of Macedonia | TR | Turkey |
| BG | Bulgaria | HU | Hungary | ML | Mali | TT | Trinidad and Tobago |
| BJ | Benin | IE | Ireland | MN | Mongolia | UA | Ukraine |
| BR | Brazil | IL | Israel | MR | Mauritania | UG | Uganda |
| BY | Belarus | IS | Iceland | MW | Malawi | US | United States of America |
| CA | Canada | IT | Italy | MX | Mexico | UZ | Uzbekistan |
| CF | Central African Republic | JP | Japan | NE | Niger | VN | Viet Nam |
| CG | Congo | KE | Kenya | NL | Netherlands | YU | Yugoslavia |
| CH | Switzerland | KG | Kyrgyzstan | NO | Norway | ZW | Zimbabwe |
| CI | Côte d'Ivoire | KP | Democratic People's | NZ | New Zealand | | |
| CM | Cameroon | | Republic of Korea | PL | Poland | | |
| CN | China | KR | Republic of Korea | PT | Portugal | | |
| CU | Cuba | KZ | Kazakstan | RO | Romania | | |
| CZ | Czech Republic | LC | Saint Lucia | RU | Russian Federation | | |
| DE | Germany | LI | Liechtenstein | SD | Sudan | | |
| DK | Denmark | LK | Sri Lanka | SE | Sweden | | |
| EE | Estonia | LR | Liberia | SG | Singapore | | |

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/12897

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H04Q7/38

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|----------------------------------------------------------------------------------------------------------------------|-------------------------------------------|
| X | WO 95 28063 A (NOKIA TELECOMMUNICATIONS OY ;JOKIAHO TIMO (FI); RAJALA JUSSI (FI); 19 October 1995 (1995-10-19) | 3-13, 19-22, 30, 34-36, 40,41 |
| A | page 8, line 23 -page 10, line 22 page 16, line 26 -page 19, line 31 --- -/-- | 1,2, 23-29, 31-33, 42,43 |

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

14 October 1999

Date of mailing of the international search report

31 01 2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2

NL - 2280 HV Rijswijk

Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,

Fax: (+31-70) 340-3016

Authorized officer

JANYSZEK J.M.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/12897

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|
| A | <p>CULLEN J M ET AL: "THE UNIVERSAL MOBILE TELECOMMUNICATIONS SYSTEM - A MOBILE NETWORK FOR THE 21ST CENTURY" BT TECHNOLOGY JOURNAL, vol. 14, no. 3, 1 July 1996 (1996-07-01), pages 123-131, XP000598162 ISSN: 0265-0193 paragraph [0004]</p> <p style="text-align: center;">---</p> | 1,3,4,6, 7,19-23, 30,40-43 |
| A | <p>EP 0 520 433 A (NIPPON ELECTRIC CO) 30 December 1992 (1992-12-30) claim 1</p> <p style="text-align: center;">---</p> | |
| A | <p>BERRUTO E: "RESEARCH ACTIVITIES ON UMTS RADIO INTERFACE, NETWORK ARCHITECTURES, AND PLANNING" IEEE COMMUNICATIONS MAGAZINE, vol. 36, no. 2, 1 February 1998 (1998-02-01), pages 82-95, XP000740416 ISSN: 0163-6804</p> <p style="text-align: center;">-----</p> | |

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 99/ 12897

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1-13, 19-43

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

1. Claims: 1-13,19-43

Location update method when moving from a first to a second
RNC

2. Claims: 14-18

inter-core network entity handover

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. Application No

PCT/US 99/12897

| Patent document cited in search report | Publication date | Patent family member(s) | Publication date |
|-------------------------------------------|---------------------|----------------------------|---------------------|
| WO 9528063 A | 19-10-1995 | FI 941652 A | 09-10-1995 |
| | | AU 694242 B | 16-07-1998 |
| | | AU 2778795 A | 30-10-1995 |
| | | CN 1145156 A | 12-03-1997 |
| | | EP 0754395 A | 22-01-1997 |
| | | JP 9511632 T | 18-11-1997 |
| | | US 5889770 A | 30-03-1999 |
| ----- | | | |
| EP 0520433 A | 30-12-1992 | JP 2643666 B | 20-08-1997 |
| | | JP 5007180 A | 14-01-1993 |
| | | JP 5063638 A | 12-03-1993 |
| | | AU 652256 B | 18-08-1994 |
| | | AU 1846792 A | 07-01-1993 |
| | | CA 2071027 A | 27-12-1992 |
| | | DE 69228503 D | 08-04-1999 |
| | | DE 69228503 T | 15-07-1999 |
| | | US 5842128 A | 24-11-1998 |
| ----- | | | |

THIS PAGE BLANK (USPTO)